



| SECTION | PAGE |
|--|-------------|
| BUILDING SUPERCHARGERS | 26-27 |
| TECHNICAL INFORMATION | 28-39 |
| SUPERCHARGER KITS | |
| Weiland 142 Pro-Street | 40 |
| Weiland 177 Pro-Street | 41 |
| Weiland 250 Pro-Street | 42 |
| Weiland 256 Pro-Street | 42 |
| Weiland 6-71 - 8-71 | 43 |
| SERVICE PARTS AND ACCESSORIES | 44-52 |

SUPERCHARGERS



SUPERCHARGERS

INTRODUCTION

HOW WEIAND BUILDS SUPERCHARGERS

MANIFOLDS



1. Each rotor is made from 6061-T6 aluminum that is extruded in the shape of a rotor, and rough-cut to the approximate length required for each size blower.

SUPERCHARGERS



3. Rotor shaft orientation is checked for precision operation at Weiland's close rotor-to-rotor and rotor-to-case clearances.



5. Precision-machined blower cases are now ready for final assembly, or (in the case of marine blowers) hard anodizing.

WATER PUMPS



2. The rotors are then machined to the final profile to ensure a tight seal between each other and the supercharger case.



4. Supercharger cases are machined on state-of-the-art CNC equipment - the only way to make the best blowers in the business.



6. These marine supercharger cases are awaiting final assembly, and are destined for Mercury Marine.

PART# TO PAGE INDEX



HOW WEIAND BUILDS SUPERCHARGERS



7. Skilled craftspeople assemble each blower. For Weiland blowers to make the best boost in the business, care is taken during assembly and set-up



8. Rotor-to-rotor and rotor-to-case clearances are checked for smooth operation




9. Rotational torque is checked to ensure that every customer gets a smooth running supercharger



10. Every blower is set up and run in this test cell to break in the components and...



11. ... is automatically tested for boost pressure and air flow at varying speed points up to maximum RPM. No other supercharger company tests their superchargers this rigorously. This ensures that every supercharger is worthy of the Weiland name.



12. Test conditions and results are recorded and filed for future reference for the continuous improvement and refinement of Weiland superchargers.



13. Then, each blower is brought "hot off the press" to be cleaned and inspected.



14. Before shipping, each supercharger is carefully packaged using the same expandable-foam packing as Holley's famous carburetors.



15. Blowers, blowers, everywhere! These units are about to be shipped to eager customers...and then hit the street, track, or marina!

MANIFOLDS

SUPERCHARGERS

WATER PUMPS

PART# TO PAGE INDEX

Tech Line: 270-781-9741

27

SUPERCHARGERS

TECHNICAL INFORMATION

WEIAND SUPERCHARGER TECHNICAL INFORMATION

MANIFOLDS

Supercharger Basics

There are currently three basic types of superchargers being sold in the performance market today: the Roots type (all Weiland Superchargers are Roots blowers), centrifugal, and "screw" type. (Note that throughout this tech manual the terms "supercharger" and "blower" are used interchangeably since they mean exactly the same thing.)

The centrifugal supercharger is very similar to a turbocharger, except the centrifugal supercharger is driven by a belt off the engine, while the turbocharger is driven by the force of exhaust gases. These type of superchargers (or turbos) run at extremely high speeds. To achieve these high speeds in the centrifugal supercharger, there is an additional internal step-up drive inside the blower. Due to the design of these units, the faster the impeller spins, the more boost the blower makes. As a result, these units typically do not produce much power at low engine speeds because the impeller is not spinning fast enough to make much boost. If it were even possible to gear the blower so that it would spin fast at low engine speeds, it would then make too much boost at higher engine speeds. Turbos employ a device called a "wastegate," which bypasses exhaust gas past the turbo when a certain boost limit is reached. Turbos also have a "lag" at low RPMs.

SUPERCHARGERS

The screw type blower appears somewhat similar to a Roots type blower from the outside, but the internal rotors are quite different. In a screw type blower, the rotors interleave one another and as the outside air is drawn into the blower the rotors progressively compress the air inside the blower as it passes along the rotors. These rotors require an extremely high degree of tolerance and, as a result, the screw type supercharger is more expensive than a Roots.

The Roots blower is the simplest of all blowers and therefore is also the least expensive. A Roots blower does not compress the air inside the supercharger. It is actually an air pump. The compression of the inlet charge (creation of boost) actually takes place in the cylinders and the manifold.

Centrifugal superchargers and screw type superchargers are called "internal compression" blowers because the air compression takes place inside the supercharger. Roots superchargers are "external compression" blowers because the air compression takes place outside of the supercharger.

Roots type superchargers first appeared in automotive applications as far back as the 1930s. The basic design of a Roots

supercharger has been developed over many years and has resulted in a highly refined product offered by Holley under the Weiland brand.

Roots blowers have been used on GMC diesel engines for many years. In the late 1950s, Phil Weiland was in the forefront of the development and adaptation of these superchargers for racing and performance applications. The company was active in producing manifolds and drive systems for adapting GMC diesel superchargers, such as the 4-71 and 6-71, followed by the development of its own superchargers that are completely manufactured by Weiland (including 8-71 models).

What a Supercharger Does

An internal combustion gasoline engine draws in air which is mixed with gasoline. This "fuel/air charge" is drawn into the cylinders as a result of the vacuum created when the piston travels down the cylinder. When the piston goes back up, this fuel/air charge is compressed to a fraction of its original volume. If an engine has a 9:1 compression ratio, the fuel/air charge will be compressed to 1/9th of its original volume. When the spark plug ignites this compressed fuel/air charge, the resulting combustion causes an expansion of the charge which forces the piston down.

As you pack more fuel and air into the cylinder, the combustion charge becomes more powerful and the engine produces more power and torque.

In an unblown engine, when the piston goes down on the intake stroke, atmospheric pressure tries to fill the void now present in the cylinder. If the cylinder filled completely with air, the engine would have a volumetric efficiency of 100%. Due to the restrictions in any engine created by the air cleaner, cylinder head and cam timing, all of the air that should get into the cylinder can't, so the typical engine's volumetric efficiency is less than 100%. By removing these restrictions, or at least reducing them by improving the cylinder heads and cam timing and using a larger carburetor, the volumetric efficiency of an unblown engine can be improved.

With a supercharger, the amount of air and fuel that can be packed into the cylinders greatly exceeds the 100% volumetric efficiency of a highly refined unblown engine. Since the air is now being forced into the engine, you can put a substantially denser fuel/air charge into the cylinders. On most street type blown applications running 6 to 7 pounds of boost, approximately 40 to 50% more fuel and air can be packed into the cylinders than in a comparable unblown engine. The reason that larger displacement engines make more power and torque than smaller ones is that more fuel and air are available for combustion. As a result of super-

WATER PUMPS

PART# TO PAGE INDEX



charging, a small displacement supercharged engine can produce similar horsepower and torque to a naturally aspirated larger displacement engine.

With a Roots blower, the carburetor functions basically the same as it would on an unblown engine, except it now sits on top of the supercharger. Although this is somewhat of a simplification, you can think of a roots supercharger installation as removing the carb and intake manifold from the engine and reinstalling the blower and blower manifold in its place and then bolting the carb on top of the blower. Then a belt is attached to pulleys on the blower and the crankshaft to turn the supercharger.

Explaining Boost

Boost is the amount of air pressure created by the supercharger. Supercharger boost is largely misunderstood, even by some experienced performance enthusiasts.

One important thing to keep in mind with respect to Weiland roots superchargers is that throughout the RPM range, the air ratio of the supercharger is consistent with the engine displacement. Supercharger boost, however, is not totally constant.

This is because at lower blower speeds, the clearances between the blower case and the rotors allows for air "leakage" with some loss of boost efficiency. If your engine is not as free-breathing as it could be (because it has a stock or low performance cam, small valves, restricted ports, etc.) you will typically see the boost readings go up in the higher rpm ranges. This is because the boost the blower is making cannot fully get into the cylinders due to these restrictions, and the boost pressure starts building up in the manifold, which is typically where the boost readings are taken, therefore, artificially high readings will be observed. Interestingly, this means a supercharged engine can make more power with lower reading on the boost gauge.

Boost is a function of three things: the displacement of the engine, the displacement of the blower, and the speed that the blower is turned in relationship to the engine speed. There are a few basics to remember. Assuming a constant speed ratio between the engine and the blower, a larger blower will make more boost than a smaller one on the same size engine. As engine size goes up, boost goes down if the blower speed and blower size remain constant. Conversely, as engine size goes down, boost goes up. On a given size blower and a given size engine, boost can be increased by running the blower faster in relation to the engine's speed

(overdriving) or it can be decreased by running it slower (underdriving).

As a very rough rule of thumb, you typically want to run larger blowers on larger engines. However, there is no reason you can't run a larger blower on a small engine, such as a 6-71 on a small block 327, as long as you adjust your drive pulleys to get the blower to run slow enough to keep the boost down to a level that is appropriate for the compression ratio you are running. Conversely, it is not practical to run a small blower on a big engine, because you would have to turn the blower so fast to make a reasonable amount of boost that the blower would become very inefficient, particularly at higher engine speeds. When Roots blowers are turned at very high speeds, they actually can heat up the inlet air to such an extent that the air expands substantially. This overheated expanded air loses so much density that even though your boost gauge says the blower is making boost, in reality you aren't putting any more air into the engine than an unblown engine would get.

Running the blower very slowly in relation to engine speed, such as would occur in our example above of a 6-71 on a 327, would result in inefficiencies at lower engine speeds. A slow turning blower, especially a larger one like a 6-71, would have a lot of low speed "leakage" of boost pressure past the clearances between the rotors and the blower case. This leakage reduces low speed boost pressure, with a resultant decrease in the amount of additional power produced. This is why it is important to have a blower that is sized in relationship to the engine displacement. In this instance, if the blower pulleys were selected to make decent boost at low engine speed, you would end up with excessive boost at higher engine speeds. Additionally, keep in mind that the larger the blower, the more potential for low speed boost "leakage" to occur because the total clearance path is much longer on a larger blower.

Many people assume a blower is making boost 100% of the time. In actuality, the blower normally only goes into boost when the throttle is opened substantially or when the vehicle is under load, such as going up a steep hill or pulling a trailer. In order to make boost, the blower must get air, and during most driving you will only have the throttle open a slight amount. Interestingly enough, even when not making boost, the spinning rotors improve the volumetric efficiency of the engine to the point where you can maintain high cruising speeds at lesser throttle openings, and in normal driving around town, you will notice that the vehicle is much livelier even when not making boost. This phenomenon can improve

MANIFOLDS

SUPERCHARGERS

WATER PUMPS

PART# TO PAGE INDEX

SUPERCHARGERS

TECHNICAL INFORMATION

WEIAND SUPERCHARGER TECHNICAL INFORMATION

MANIFOLDS

gas mileage under certain circumstances, although typically on an overall basis fuel economy will decrease about 3%. This isn't much of a factor. If your car was getting 20 mpg before the blower, that means you will be getting 19.4 mpg after the blower installation but with a 40 to 50% increase in horsepower.

Weiland Pro-Street 6-71 and 8-71 supercharger kits come with drive ratios that will typically produce 11 to 13 pounds of boost on a 350 cid engine and 5 to 7 pounds of boost on a 454 cid engine. See our additional drive ratio charts at the end of this section. If your engine is smaller than this, your boost will be higher. If your engine is larger, your boost will be lower.

SUPERCHARGERS

We state that your boost will fall within a particular range, such as from 5 to 8 pounds, because a lot of factors can cause boost to vary. Depending upon how well your engine breathes, the amount of observed boost on a gauge can vary substantially. If you install a Weiland blower and your observed boost comes up on the low end of our estimated range, it means you have a really good breathing engine. Another factor that can contribute to low boost is a restricted air inlet or too small of a carburetor. Remember that at full throttle your engine is going to need about 50% more air than it did before the blower was installed. Are your air cleaner and carburetor capable of letting in 50% more air? If not, you won't make the boost that the blower is capable of.

WATER PUMPS

The amount of boost that can safely be run is primarily determined by the compression ratio of your engine and the gas that you are using. As a basic rule of thumb, the 5 to 8 pound boost range that is provided by the standard pulleys supplied in Weiland's supercharger kits is suitable for compression ratios in the 8 to 9:1 range. Example: 8 pounds on a 9:1 engine would yield a 13:9:1 compression ratio. An 8:1 engine with 5-6 pounds of boost is safe with 92 octane pump gas. If your compression ratio is higher than this, you will have to run less boost. If it is lower than this, you can run more boost. The key to any supercharger installation is that detonation must be controlled. Detonation in a blown engine is more destructive than in an unblown engine, and damage to piston ring lands (or worse) will occur if you continue to drive a blown engine that is detonating.

PART# TO PAGE INDEX

Many enthusiasts will experiment with increasing the boost until detonation occurs and then back down to the last boost level achieved without detonation. This requires purchasing

additional optional pulleys. Remember that rarely are any two modified engines similar in how they react to boost and compression ratio combinations, so don't expect to copy what someone else may have done and achieve a successful installation. Unfortunately, as in many aspects of dealing with modified engines, trial and error is about the only way to achieve your ideal combination.

Please consult the charts in this Technical Section and the replacement pulley section for help in determining the pulleys and blower sizes that will best suit your specific application. In most instances, this will provide you with enough information to provide a workable and safe combination that will provide substantial performance improvements. For those of you who would like to achieve the ultimate in performance from your particular setup, the data provided in our charts will give you an excellent starting point on which you may build to reach your goals.

Compression Ratio/Boost Pressure

The compression ratio of your engine has a direct relationship to how much boost you can run. If you have a high compression ratio, such 9.5:1 or 10:1, you will only be able to run a small amount of boost.

The compression ratio that is built into your engine is called "static compression." When you combine the boost you are running in conjunction with your compression ratio, the result is known as the "Effective Compression Ratio." Formulas have been developed that convert your static compression and supercharger boost to the effective compression ratio. Table 1 provides this information.

You can find your static compression ratio on the left side of the chart. Then read across to the right under the boost you want to run and the number in the box will be your "effective" compression ratio. Experience has shown that if you attempt to run more than about a 12:1 effective compression ratio on a street engine with 92 octane pump gas, you will have detonation problems. To some degree, this can be controlled with boost retard devices, but we do not recommend that you set up your engine and supercharger to provide more than a 12:1 effective compression ratio. Please note that all engines differ in their tolerance to detonation. You can build what appear to be two identical engines and one will detonate and the other one won't, so the numbers given in this chart are not absolute hard and fast figures. However, if you follow this chart, you will be close enough that if you do experience some detonation, you should have no trouble



controlling it with one of the aftermarket boost retard ignition systems.

Table 1 shows that you obviously can't try to run 10 pounds of boost on a 9.0:1 compression ratio engine. This gives you an effective compression ratio of 15.1:1, way beyond our 12:1 figure. If you are building your engine from scratch, it is a good idea to try to build it with a relatively low compression ratio, such as 7.5 or 8.0:1.

It is fairly easy to change the boost to get the best combination of performance and power, but it is extremely difficult to change the compression ratio, especially if you want to lower it. Additionally, you will make more total power with a low compression, high boost engine than you will with a high compression, low boost engine.

MANIFOLDS

Table1: Effective Compression Ratio Chart

| Static Compression Ratio | Blower Boost pressure (psi) | | | | | | | | | | | | |
|--------------------------|-----------------------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| | 2 | 4 | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 24 | 26 |
| 6.0:1 | 6.8:1 | 7.6:1 | 8.4:1 | 9.3:1 | 10.1:1 | 10.9:1 | 11.7:1 | 12.5:1 | 13.3:1 | 14.2:1 | 15.0:1 | 15.8:1 | 16.6:1 |
| 6.5:1 | 7.4:1 | 8.3:1 | 9.2:1 | 10.0:1 | 10.9:1 | 11.8:1 | 12.7:1 | 13.6:1 | 14.5:1 | 15.3:1 | 16.2:1 | 17.1:1 | 18.0:1 |
| 7.0:1 | 8.0:1 | 8.9:1 | 9.9:1 | 10.8:1 | 11.8:1 | 12.7:1 | 13.7:1 | 14.6:1 | 15.6:1 | 16.5:1 | 17.5:1 | 18.4:1 | 19.4:1 |
| 7.5:1 | 8.5:1 | 9.5:1 | 10.6:1 | 11.6:1 | 12.6:1 | 13.6:1 | 14.6:1 | 15.7:1 | 16.7:1 | 17.7:1 | 18.7:1 | 19.7:1 | 20.8:1 |
| 8.0:1 | 9.1:1 | 10.2:1 | 11.3:1 | 12.4:1 | 13.4:1 | 14.5:1 | 15.6:1 | 16.7:1 | 17.8:1 | 18.9:1 | 20.0:1 | 21.1:1 | 22.1:1 |
| 8.5:1 | 9.7:1 | 10.8:1 | 12.0:1 | 13.1:1 | 14.3:1 | 15.4:1 | 16.6:1 | 17.8:1 | 18.9:1 | 20.1:1 | 21.2:1 | 22.4:1 | 23.5:1 |
| 9.0:1 | 10.2:1 | 11.4:1 | 12.7:1 | 13.9:1 | 15.1:1 | 16.3:1 | 17.6:1 | 18.8:1 | 20.0:1 | 21.2:1 | 22.5:1 | 23.7:1 | 24.9:1 |
| 9.5:1 | 10.8:1 | 12.1:1 | 13.4:1 | 14.7:1 | 16.0:1 | 17.3:1 | 18.5:1 | 19.8:1 | 21.1:1 | 22.4:1 | 23.7:1 | 25.0:1 | 26.3:1 |
| 10.0:1 | 11.4:1 | 12.7:1 | 14.1:1 | 15.4:1 | 16.8:1 | 18.2:1 | 19.5:1 | 20.9:1 | 22.2:1 | 23.6:1 | 25.0:1 | 26.3:1 | 27.7:1 |
| 10.5:1 | 11.9:1 | 13.4:1 | 14.8:1 | 16.2:1 | 17.6:1 | 19.1:1 | 20.5:1 | 21.9:1 | 23.4:1 | 24.8:1 | 26.2:1 | 27.6:1 | 29.1:1 |
| 11.0:1 | 12.5:1 | 14.0:1 | 15.5:1 | 17.0:1 | 18.5:1 | 20.0:1 | 21.5:1 | 23.0:1 | 24.5:1 | 26.0:1 | 27.5:1 | 29.0:1 | 30.5:1 |

The above chart shows the effective compression ratio of your engine, which combines the static compression ratio with the amount of supercharger boost. Note that for most street applications with 92 octane pump gas, you should keep your effective compression ratio below about 12.0:1

SUPERCHARGERS

Weiland Supercharger Sizes

Weiland currently offers the following size blowers for four different types of engines:

Small Block Chevrolet V-8

- Pro-Street 142
- Pro-Street 177
- Pro-Street 250
- 6-71 & 8-71 Street

Big Block Chevrolet

- Pro-Street 177
- Pro-Street 256
- Pro-Street 250
- 6-71 Street & 8-71 Street

Chrysler Hemi

- 6-71 Street (392)
- 8-71 Street (426)

Small Block Ford V-8 289-302

Pro-Street 174

The numbers related to these blower sizes, such as 142, 177, and 256, relate to the amount of air in cubic inches that is pumped by the blower in one blower revolution. The 6-71 and 8-71 designations refer to the original GMC diesel engines. Table 2 shows the amount of air per blower revolution the Weiland blowers pump.

Table 2: Supercharger Volumes

| Supercharger Type | Approximate CID of Air Per Revolution |
|-------------------|---------------------------------------|
| Pro-Street 142 | 142 |
| Pro-Street 177 | 177 |
| Pro-Street 256 | 256 |
| Pro-Street 250 | 250 |
| Weiland 6-71 | 411 |
| Weiland 8-71 | 436 |

WATER PUMPS

PART# TO PAGE INDEX

SUPERCHARGERS

TECHNICAL INFORMATION

WEIAND SUPERCHARGER TECHNICAL INFORMATION

MANIFOLDS

In selecting the proper supercharger for your application, you also need to take into consideration how you plan to drive your vehicle and the approximate boost level desired. How you plan to drive your vehicle is important because you can set up your blower to be more efficient at high engine speeds or more efficient at low engine speeds, or you can arrange for the best compromise for the full engine rpm range.

For example, if your vehicle typically will be driven at speeds under 4,500 rpm and will never, or infrequently, see high engine speeds, you may want to select one of Weiand's smaller blowers. A smaller blower can be driven at a higher speed, which will produce a substantial amount of boost, particularly at lower engine speeds. However, this high blower speed will be less effective at higher engine speeds due to the overheating of the inlet air as discussed earlier.

Conversely, if you choose a larger blower for this same application, in order to achieve the same boost level, the larger blower will have to be turned at a relatively slow speed. This combination will not produce the low end power that the faster turning small blower will, but will significantly outperform the small blower at high engine speeds. However, if you never drive your vehicle in the higher speed ranges, you may be giving up impressive improvements in the lower speed ranges. You may choose to do this anyway because you want the look of the larger blower and are willing to give up some bottom end performance.

To be more specific, the Pro-Street/ Marine 142 makes an excellent low to midrange blower for a 350 Chevy. The 6-71 is best for mid to high rpm ranges. The 8-71 is for all-out competition style engines that will see high rpm usage. The Pro-Street 177 is a good all-around compromise that will perform well across the board, but it still won't deliver as much power as the 6-71 or 8-71 at extreme engine speeds. These recommendations are based on setting up all three blowers at a similar boost output.

For big blocks, Weiand offers the Pro-Street 177 for good low to midrange power, the 6-71 for strong mid to high-range power, and the 8-71 or large displacement, high boost/rpm engines. The Pro-Street 256 is a good all around compromise.

Again, the 6-71 will outperform the smaller blowers in the high rpm ranges.

Supercharger Rotors

Weiand uses two types of supercharger rotors. The smaller superchargers use new (not remanufactured) CAD/CAM designed two lobe rotors. These rotors were designed to hold their tolerances 360° for maximum boost pressure efficiency. Two lobe rotors feature thick walls and a solid shaft, which prevent flexing at higher boost levels. The supercharger case is smaller because the two lobe rotor design takes up less area in the case. This allows for a more compact package for easier underhood installation in many applications.

Weiand's 8-71 superchargers use three lobe helix rotors. The helix style rotor was developed by General Motors for larger GMC superchargers. They are more efficient than a two lobe rotor because they use less horsepower to supply a greater volume of cooler air charge to the cylinders. Helix rotors also resist flex under extremely high boost situations. These superchargers use larger cases, allowing for a greater volume of air displacement per rotor revolution.

There is also a version of the three lobe helix rotor used in racing called the "hihelix" rotor. This design has even more "twist" imparted into the blower rotor and does provide more power. These blowers were developed for Alcohol Dragster and Funny Car racing and are extremely expensive, making them impractical for anything but professional racing. The increase in performance is not justified by the increase in cost for street applications.

Expected Performance Increases

Installing a blower is one of the easiest ways to substantially improve a vehicle's overall performance. With one of Weiand's superchargers, here are some of the improvements you can expect:

- 1. Improved starting.** A properly set up blown engine typically will fire instantly, usually before the engine has even made one revolution. This is because the blower immediately is pushing the inlet charge right into the cylinder, rather than waiting for the engine vacuum to draw the charge into the cylinder.
- 2. Substantial increases in bottom-end performance.** While this is true with all Weiand blowers, it is particularly attributable to the smaller ones.

SUPERCHARGERS

WATER PUMPS

PART# TO PAGE INDEX



3. Substantial horsepower increases. Bolting one of Weiland's Pro-Street Superchargers on an otherwise stock small block Chevy will result in an increase of approximately 100 to 120 hp. Usually with a mild blower cam and a larger carburetor you can expect a typical small block to produce anywhere from 360 to 400 streetable horsepower. The addition of a set of good heads can boost this into the 440 to 470 hp range. Torque on an engine of this type typically will be in the 400 to 440 lb.-ft. range. All of these figures are based on a blower that is producing about 6 or 7 pounds of boost. A larger blower, such as Weiland's 6-71, on a similar engine to the one described above could push the top power output well over 500 hp.

NOTE: It is important to understand that for all practical purposes, an engine does not know what size supercharger is bolted to it. The amount of boost that is being produced by the blower is the critical factor. So our power output estimates above are somewhat typical of any of Weiland's blowers, with the following exceptions: At very low engine speeds, the smaller blowers will typically produce more torque than the bigger blowers. At very high engine speeds, the larger blowers will produce substantially more power than the smaller blowers.

Other Engine Modifications

One of the big advantages of a supercharger is that it can overcome many induction deficiencies in an engine, especially in the low to mid-range rpm area. Weiland Pro-Street and 6-71 superchargers can be installed on a stock engine, as long as the static compression ratio is 9:1 or less and engine speed is limited to 6,000 rpm. Most stock engines are equipped with cast pistons, cast crankshaft, two bolt main caps, and a small camshaft, requiring you to run very low boost pressure of 3 to 5 pounds maximum. Higher boost levels will cause detonation and engine failure.

To run boost levels from 6 to 10 pounds we recommend the following:

- Forged blower pistons with a static compression ratio of 7.5:1
- Steel crankshaft
- Four bolt main caps
- Steel harmonic dampener

- Stainless steel valves
- Three angle valve job
- More aggressive camshaft
- Roller rockers
- Ported and polished heads
- Steel rods with good rod bolts
- Chromoly push rods
- High output ignition
- Weiland high flow water pump (cast iron or aluminum available - see our complete catalog for applications)
- Minimum of a 2-1/2" diameter dual exhaust with headers. Recommended primary tube diameters and collector sizes are:
Small Blocks: 1-5/8" to 1-3/4" with 3" collectors
Big Blocks: 1-7/8" to 2" with 3-1/2" collectors

For maximum boost and horsepower applications (12 pounds or more), we recommend the following engine specifications:

- High quality forged or billet double keyed crankshaft
- Four bolt main caps with quality bolts or studs
- Steel double keyed harmonic balancer or crank hub
- High quality steel rods (H or I beam)
- Forged blower pistons
- O-ringing the block (mandatory)
- Severe duty stainless steel valves or iconel
- Fully ported and polished heads
- Solid or roller cam designed for high boost
- Roller rockers
- Chromoly push rods
- High output ignition management system or magneto
- Blueprinted carburetors or fuel injection
- High octane race fuel (112+ rating)
- Minimum of a 3" diameter dual exhaust with free flowing street/race mufflers and large tube headers.
- Recommended primary tube diameters and collector sizes are:
Small Blocks: 1-7/8" to 2" with 3-1/2" collectors Big Blocks: 2-1/8" to 2-1/4", with 4" collectors
- Maximum effective compression ratio on gas not to exceed 24:1

It's important to realize that there are no hard and fast rules and the suggestions made here are general in nature.

MANIFOLDS

SUPERCHARGERS

WATER PUMPS

PART# TO PAGE INDEX

Tech Line: 270-781-9741

33

SUPERCHARGERS

TECHNICAL INFORMATION

WEIAND SUPERCHARGER TECHNICAL INFORMATION

MANIFOLDS

SUPERCHARGERS

WATER PUMPS

PART# TO PAGE INDEX

Carburetion with a Blower

Choosing a carburetor is a very important step in building a blower motor. Under boost, the engine could need up to 40 to 50% more fuel and air, so it's key to pick a carburetor that is up to the task. If your carburetor can't provide enough fuel and air, you can't take full advantage of your supercharger and you won't be able to make maximum boost.

In addition to providing fuel for the motor, the carburetor also is the restriction through which air must pass to get into the blower and the motor. Running too small a carburetor therefore means that you can't flow enough air to produce maximum boost.

It's very simple: If a supercharger can't draw the air and fuel into it, you can't get horsepower out.

The amount your carburetor needs to flow depends on engine characteristics and on the amount of boost your blower will be making. There's a formula for determining the required carburetor cfm:

$$\text{Maximum CFM Required} = \frac{\text{Engine CID} \times \text{Maximum Engine RPM}}{356} \times \left[\frac{\text{Maximum Blower Boost}}{14.7} + 1 \right]$$

For those of you who don't want to do the math, Table 3 is a chart with guidelines for carburetor usage depending on the application:

Table 3: Supercharger Carburetor Selection

| Blower Size | Engine | Approximate Required CFM* | Holley Carb(s) P/N | Holley HP Carb(s) P/N |
|-------------|---------------------------|---------------------------|--------------------|-----------------------|
| 142 | Chevrolet Small Block 350 | 700 | 0-80572S | 0-80576 |
| 174 | Ford Small Block 302 | 750 | 0-80573S | 0-80576 |
| 177 | Chevrolet Big Block 454 | 800 | | 0-80576 |
| 256 | Chevrolet Big Block 454 | (2) 750 | 0-80573S | 0-80576 |
| 420 | Chevrolet Small Block 350 | (2) 600 | 0-80592S | 0-80575 |
| 420 | Chevrolet Big Block 454 | (2) 750 | 0-80573S | 0-80576 |
| 6-71 | Chevrolet Small Block 350 | (2) 600 | 0-80592S | 0-80575 |
| 6-71 | Chevrolet Big Block 454 | (2) 750 | 0-80573S | 0-80576 |
| 6-71 | Chrysler HEMI 392 | (2) 750 | 0-80573S | 0-80576 |
| 8-71 | Chevrolet Small Block 350 | (2) 750 | 0-80573S | 0-80576 |
| 8-71 | Chevrolet Big Block 454 | (2) 800 | | 0-80576 |
| 8-71 | Chrysler HEMI 426 | (2) 750 | 0-80573S | 0-80576 |

If your carburetor is too lean, it will cause detonation, which can destroy your motor. How do you know if it's too lean? You'll have several obvious indications, like glowing red headers, audible "lean pop," or engine surging. Even if you don't experience these conditions, you should still read your spark plugs for proper color. You want to see a medium to dark tan color.

If you run one or more Holley carburetors, be aware that they contain power valves. Power valves provide additional fuel when there is no vacuum at the base of the carburetor. However, in a blower application, there will always be some vacuum, so the power valves will not function properly. You will need carburetors that have a "boost referenced" power valve circuit. Holley "Supercharger Carburetors" are specifically designed with this feature. In addition, they also are 100% wet-flowed, equipped, and calibrated for the special needs of a supercharged engine.

Weiland offers several components for use on carbureted applications, including a stainless steel fuel line kit for side-mounted Holleys and high performance carburetor linkage kits for Holleys. To complete your supercharger installation, use a Weiland air scoop (Hilborn or Enderle style). Several styles of chrome air cleaners also are available and are listed separately in this catalog.



Holley "Supercharger Carburetors" are specifically designed with a "boost referenced" power valve circuit. In addition, they also are 100% wet-flowed and calibrated for the special needs of a supercharged engine.



Ignition Systems with a Supercharger

Many street supercharger applications will work fine with the stock ignition system, because blown engines make so much low and mid-range power, it is not necessary to rev to high rpm's. High performance ignitions are primarily required to provide adequate spark at higher than normal rpm's. If most of your driving is going to be under 5,500 rpm, you probably won't need an aftermarket ignition. For optimum performance at higher engine rpm's, select an aftermarket performance ignition system.

It is usually a good idea to run spark plugs that are one to two ranges colder than normal with a blower. The more boost, the colder the plug required. Colder plugs will foul easier than hotter plugs, so in this instance a "hot" ignition may be advisable.

The main thing that needs to be addressed with a blower is to make sure that detonation is controlled. A handy device to have is "boost retard control". With the use of this unit, you can run normal timing settings which will allow for easy starting and reasonable fuel economy under normal driving situations. However, when you step on the gas and the engine goes into boost, this timing setting may cause detonation. With the "boost retard control," the driver can dial in ignition retard with a dash-mounted knob. These devices usually operate on a "degrees of retard per pound of boost" and are typically adjustable from 1° to 3° of retard per pound of boost. As an example, if the unit is set to deliver 1° per pound of boost, that means that when your blower is putting out 4 pounds of boost the distributor will be automatically be retarded by 4°. When you reach 7 pounds of boost, it will be retarded by 7°. Best results are achieved by driving the vehicle under boost and adjusting the unit until any detonation is eliminated.

NOTE: We do not recommend using these devices in marine applications. Retarding the timing under boost increases the combustion temperatures. On a street vehicle, this typically occurs for short periods of time. In marine applications the engine is usually in full boost all of the time. As a result, these prolonged high combustion temperatures can burn pistons or valves.

Most blown engines operate best on 28 to 34° of total timing. Running more total advance will not provide any performance increase.

Your distributor should have a centrifugal advance mechanism that has been set up so that all of the advance is in by 2,500 rpm. The best way to set your timing is to put a permanent mark on your harmonic damper that represents 34° total advance. If your damper doesn't go this far, you can

measure the timing marks on your damper and then, using your measuring tape, calculate where 34° would be. 34° is a very safe figure and should provide close to optimum performance.

After you mark off 34°, start your engine and rev it up to a speed where all the distributor's mechanical advance will be in. This should be somewhere over 2,500 rpm. Then read the new 34° mark like you would read TDC at idle speed. Adjust the distributor so that the new mark on the damper lines up with the "0" on your timing tab. This would provide 34° of total timing or if you wanted 32° of total timing, you could line up the mark on the damper with the 2° ATDC mark on the timing tab instead of "0."

Supercharger Engine Camshafts

The choice of camshaft can make or break a blower motor. A legend in the industry, Lunati offers several camshafts specifically designed to work with Weiland blower kits. In addition, the following are a few basic guidelines for selecting the proper cam for your motor.

Obviously, the amount of boost your supercharger produces is going to be a factor in choosing a camshaft. Weiland offers three different levels of superchargers, and each requires a different type of cam.

The "mildest" of Weiland's blowers are the Pro-Street superchargers, which are set to produce from 5 to 7 pounds of boost. The company recommends a hydraulic cam for these applications - where the engine will not be spun past 6,500 rpm and has several grinds available. All of these cams are ground on a 112 to 114° lobe center line, which helps maintain cylinder pressure to maximize horsepower at these lower boost levels. Keeping the cylinder pressure up also gives you excellent throttle response.

The milder cams that Weiland offers are great for street performance enthusiasts who want to gain about 100 to 120 streetable horsepower. The company also offers slightly "bigger" cams for the next performance level up.

For 6-71 and 8-71 blowers, Weiland again recommends running a hydraulic cam, as long as you keep the boost level below 10 PSI. Weiland also offers cams for these type of applications.

For your higher boost levels in gasoline burning engines, the company recommends running a flat tappet or roller cam with a 110° lobe center line. This cam design provides good overall power on pump gas and also aids in engine cooling. Plus, the 110° center line provides even sharper throttle response and helps lower initial cylinder pressure (you won't

MANIFOLDS

SUPERCHARGERS

WATER PUMPS

PART# TO PAGE INDEX

Tech Line: 270-781-9741

35

SUPERCHARGERS

TECHNICAL INFORMATION

WEIAND SUPERCHARGER TECHNICAL INFORMATION

MANIFOLDS

miss the cylinder pressure with these blowers, since they make plenty of boost).

In all supercharger applications, Weiland recommends running roller rockers and chromoly push rods.

Table 4 displays a listing of supercharger camshafts for the Chevrolet small-block (flat tappet hydraulic). For more information on Lunati's line of blower cams, consult the Lunati catalog, or call Lunati and speak with one of their cam experts at 901-365-0950.

Conclusion

Supercharging is an extremely effective way to reliably increase horsepower and torque, particularly in the low to mid rpm ranges where most street machines are operated.

Unfortunately, due to the wide use of superchargers in drag racing, many people think a supercharger is an exotic race component and is not truly suitable for the street.

Now that supercharging is becoming quite common on stock factory vehicles, more people are realizing that a supercharger is a safe, practical source of performance increases. Superchargers are currently available on several Ford models, as well as Buick and Pontiac cars. These are all Roots type superchargers and operate on the same basic principle as all of Weiland's superchargers.

If you have additional questions regarding Weiland Supercharger applications, please contact the Weiland/Holley Tech Department at 270-781-9741.

SUPERCHARGERS

Table 4: Lunati Supercharger Cams for Chevrolet Small Block (Flat Tappet)

| Description | RPM Range | Duration | | Lift | | Lope Sep Int C/L | Opens/Closes @.050 | Camshaft Part Number | Cam & Lifters Part Number |
|---|-------------|---------------|-------------------|-------------------|------------------|--------------------------|------------------------------------|-------------------------|------------------------------|
| | | Adv In/Exh | @ .050" In/Exh | @ Valve In/Exh | @ Lobe In/Exh | | | | |
| CHEVROLET Small Block V8 (1957 - Present) with oem HYD flat tappet cams | | | | | | | | | |
| Weiland Supercharger cams | | | | | | | | | |
| New! HYDRAULIC , Excellent cam for a truck with stock engine mounting a supercharger. | 2000 - 5500 | 290° 290° | 223° 223° | .447" .447" | .298" .298" | 114° Sep 111° Int C/L | 01° BTC 43° ABC 49° BBC 06° ATC | 01005 | 01005LK |
| HYDRAULIC , Good idle with strong low- and mid-range torque and power. | 2000 - 5700 | 290° 290° | 224° 224° | .460" .460" | .307" .307" | 112° Sep 108° Int C/L | 04° BTC 40° ABC 48° BBC 04° BTC | 00017 | 00017LK |
| HYDRAULIC , Good idle. Good cam for every-day performance street car. Needs headers and gears. | 2000 - 6000 | 285° 285° | 230° 230° | .455" .455" | .303" .303" | 114° Sep 109° Int C/L | 06° BTC 44° ABC 54° BBC 04° BTC | 00011 | 00011LK |
| New! HYDRAULIC , Decent idle. Great cam for street rod with well-built 350-400 CID motor. | 2200 - 6000 | 303° 313° | 234° 244° | .488" .509" | .325" .339" | 112° Sep 107° Int C/L | 10° BTC 44° ABC 59° BBC 05° ATC | 01006 | |
| New! HYDRAULIC , Lopey idle. Very good for a large engine running a lot of boost pressure. | 2600 - 6500 | 313° 328° | 244° 254° | .509" .533" | .339" .355" | 112° Sep 107° Int C/L | 15° BTC 49° BBC 64° BBC 10° ATC | 01007 | |

WATER PUMPS

PART# TO PAGE INDEX



Weiland 142 Drive Ratio & Estimated Boost Chart (PSI)

Drive Ratio (Overdriven)

| Engine | 2.44:1 | 2.28:1 | 2.15:1 | 2.11:1 | 2.00:1 | 1.95:1 | 1.87:1 | 1.85:1 | 1.71:1 | 1.60:1 |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| | 144% | 128% | 115% | 111% | 100% | 95% | 87% | 85% | 71% | 60% |
| 327 | 12.4 | 10.6 | 9.2 | 8.7 | 7.5 | 7.0 | 6.1 | 5.9 | 4.3 | 3.1 |
| 350 | 10.6 | 9.0 | 7.6 | 7.2 | 6.1 | 5.5 | 4.7 | 4.5 | 3.0 | |
| 383 | 8.4 | 6.9 | 5.7 | 5.3 | 4.3 | 3.8 | 3.0 | | | |
| 400 | 7.5 | 6.0 | 4.8 | 4.5 | 3.5 | 3.0 | 2.3 | | | |

Weiland 177 Drive Ratio & Estimated Boost Chart (PSI)

Drive Ratio (Overdriven)

| Engine | 2.44:1 | 2.28:1 | 2.15:1 | 2.11:1 | 2.00:1 | 1.95:1 | 1.87:1 | 1.85:1 | 1.71:1 | 1.60:1 | 1.50:1 | 1.41:1 |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| | 144% | 128% | 115% | 111% | 100% | 95% | 87% | 85% | 71% | 60% | 50% | 41% |
| 289 | 22.9 | 20.4 | 18.4 | 17.8 | 16.1 | 15.3 | 14.1 | 13.8 | 11.6 | 9.9 | 8.4 | 7.0 |
| 302 | 21.3 | 18.9 | 17.0 | 16.4 | 14.8 | 14.0 | 12.9 | 12.6 | 10.5 | 8.9 | 7.4 | 6.1 |
| 351 | 16.2 | 14.2 | 12.6 | 12.1 | 10.7 | 10.0 | 9.0 | 8.8 | 7.0 | 5.6 | 4.3 | 3.2 |

Weiland 177 Drive Ratio & Estimated Boost Chart (PSI)

Drive Ratio (Overdriven)

| Engine | 2.44:1 | 2.28:1 | 2.15:1 | 2.11:1 | 2.00:1 | 1.95:1 | 1.87:1 | 1.85:1 | 1.71:1 | 1.60:1 | 1.50:1 | 1.41:1 |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| | 144% | 128% | 115% | 111% | 100% | 95% | 87% | 85% | 71% | 60% | 50% | 41% |
| 350 | 16.9 | 14.8 | 13.1 | 12.6 | 11.2 | 10.5 | 9.5 | 9.2 | 7.4 | 6.0 | 4.7 | 3.5 |
| 383 | 14.1 | 12.3 | 10.7 | 10.2 | 8.9 | 8.4 | 7.4 | 7.2 | 5.5 | 4.2 | 3.0 | |
| 400 | 12.9 | 11.1 | 9.6 | 9.2 | 7.9 | 7.4 | 6.5 | 6.2 | 4.7 | 3.4 | | |
| 427 | 11.2 | 9.5 | 8.1 | 7.7 | 6.5 | 6.0 | 5.1 | 4.9 | 3.4 | | | |
| 454 | 9.6 | 8.0 | 6.7 | 6.3 | 5.2 | 4.7 | 3.9 | 3.7 | | | | |
| 502 | 7.3 | 5.9 | 4.7 | 4.3 | 3.3 | | | | | | | |

Weiland 256 Drive Ratio & Estimated Boost Chart (PSI)

Drive Ratio (Overdriven)

| Engine | 2.12:1 | 2.00:1 | 1.86:1 | 1.73:1 | 1.63:1 | 1.53:1 |
|--------|--------|--------|--------|--------|--------|--------|
| | 112% | 100% | 86% | 73% | 63% | 53% |
| 427 | 17.8 | 16.0 | 13.8 | 11.8 | 10.3 | 8.8 |
| 454 | 15.9 | 14.1 | 12.1 | 10.3 | 8.8 | 7.4 |
| 502 | 13.0 | 11.4 | 9.6 | 7.9 | 6.6 | 5.3 |
| 540 | 11.0 | 9.6 | 7.9 | 6.3 | 5.1 | 3.9 |

Weiland 6-71 Drive Ratio & Estimated Boost Chart (PSI)

Drive Ratio (Overdriven)

| Engine | 1.30:1 | 1.25:1 | 1.20:1 | 1.15:1 | 1.10:1 | 1.05:1 | 1:1 | 0.95:1 | 0.90:1 | 0.85:1 | 0.80:1 | 0.75:1 | 0.70:1 |
|--------|--------|--------|--------|--------|--------|--------|------|--------|--------|--------|--------|--------|--------|
| | 30% | 25% | 20% | 15% | 10% | 5% | 0% | -5% | -10% | -15% | -20% | -25% | -30% |
| 327 | 27.1 | 25.5 | 23.9 | 22.3 | 20.7 | 19.1 | 17.5 | 15.8 | 14.2 | 12.6 | 11.0 | 9.4 | 7.8 |
| 350 | 24.3 | 22.8 | 21.3 | 19.8 | 18.3 | 16.8 | 15.3 | 13.8 | 12.3 | 10.8 | 9.3 | 7.8 | 6.3 |
| 383 | 21.0 | 19.6 | 18.2 | 16.9 | 15.5 | 14.1 | 12.8 | 11.4 | 10.0 | 8.6 | 7.3 | 5.9 | 4.5 |
| 392 | 20.2 | 18.8 | 17.5 | 16.1 | 14.8 | 13.5 | 12.1 | 10.8 | 9.4 | 8.1 | 6.8 | 5.4 | 4.1 |
| 400 | 19.5 | 18.2 | 16.8 | 15.5 | 14.2 | 12.9 | 11.6 | 10.3 | 9.0 | 7.6 | 6.3 | 5.0 | 3.7 |
| 454 | 15.4 | 14.2 | 13.1 | 11.9 | 10.8 | 9.6 | 8.5 | 7.3 | 6.1 | 5.0 | 3.8 | | |
| 502 | 12.5 | 11.5 | 10.4 | 9.4 | 8.3 | 7.3 | 6.2 | 5.2 | 4.1 | 3.1 | | | |
| 540 | 10.6 | 9.6 | 8.7 | 7.7 | 6.7 | 5.7 | 4.8 | 3.8 | | | | | |

MANIFOLDS

SUPERCARGERS

WATER PUMPS

PART# TO PAGE INDEX

SUPERCHARGERS

TECHNICAL INFORMATION

WEIAND SUPERCHARGER TECHNICAL INFORMATION

Weiland 8-71 Drive Ratio & Estimated Boost Chart (PSI)

MANIFOLDS

| Engine | Drive Ratio (Overdriven) | | | | | | | | | | | | |
|--------|--------------------------|--------|--------|--------|--------|--------|------|--------|--------|--------|--------|--------|--------|
| | 1.30:1 | 1.25:1 | 1.20:1 | 1.15:1 | 1.10:1 | 1.05:1 | 1:1 | 0.95:1 | 0.90:1 | 0.85:1 | 0.80:1 | 0.75:1 | 0.70:1 |
| | 30% | 25% | 20% | 15% | 10% | 5% | 0% | -5% | -10% | -15% | -20% | -25% | -30% |
| 327 | 29.6 | 27.9 | 26.2 | 24.5 | 22.8 | 21.1 | 19.4 | 17.7 | 16.0 | 14.3 | 12.6 | 10.9 | 9.2 |
| 350 | 26.7 | 25.1 | 23.5 | 21.9 | 20.4 | 18.8 | 17.2 | 15.6 | 14.0 | 12.4 | 10.8 | 9.2 | 7.6 |
| 383 | 23.2 | 21.7 | 20.2 | 18.8 | 17.3 | 15.9 | 14.4 | 13.0 | 11.5 | 10.1 | 8.6 | 7.1 | 5.7 |
| 400 | 21.5 | 20.2 | 18.8 | 17.4 | 16.0 | 14.6 | 13.2 | 11.8 | 10.4 | 9.0 | 7.6 | 6.2 | 4.8 |
| 426 | 19.3 | 18.0 | 16.7 | 15.4 | 14.1 | 12.8 | 11.5 | 10.2 | 8.9 | 7.6 | 6.2 | 4.9 | 3.6 |
| 454 | 17.2 | 16.0 | 14.8 | 13.6 | 12.3 | 11.1 | 9.9 | 8.6 | 7.4 | 6.2 | 5.0 | 3.7 | |
| 502 | 14.2 | 13.1 | 12.0 | 10.8 | 9.7 | 8.6 | 7.5 | 6.4 | 5.3 | 4.2 | 3.1 | | |
| 540 | 12.1 | 11.1 | 10.1 | 9.1 | 8.0 | 7.0 | 6.0 | 4.9 | 3.9 | | | | |

Weiland 10-71 Drive Ratio & Estimated Boost Chart (PSI)

SUPERCHARGERS

| Engine | Drive Ratio (Overdriven) | | | | | | | | | | | | |
|--------|--------------------------|--------|--------|--------|--------|--------|------|--------|--------|--------|--------|--------|--------|
| | 1.30:1 | 1.25:1 | 1.20:1 | 1.15:1 | 1.10:1 | 1.05:1 | 1:1 | 0.95:1 | 0.90:1 | 0.85:1 | 0.80:1 | 0.75:1 | 0.70:1 |
| | 30% | 25% | 20% | 15% | 10% | 5% | 0% | -5% | -10% | -15% | -20% | -25% | -30% |
| 454 | 19.7 | 18.3 | 17.0 | 15.7 | 14.4 | 13.0 | 11.7 | 10.4 | 9.1 | 7.8 | 6.4 | 5.1 | 3.8 |
| 502 | 16.4 | 15.2 | 14.0 | 12.8 | 11.6 | 10.4 | 9.2 | 8.0 | 6.8 | 5.6 | 4.4 | 3.2 | |
| 540 | 14.2 | 13.1 | 12.0 | 10.8 | 9.7 | 8.6 | 7.5 | 6.4 | 5.3 | 4.2 | 3.1 | | |
| 600 | 11.3 | 10.3 | 9.3 | 8.3 | 7.3 | 6.3 | 5.3 | 4.3 | 3.3 | | | | |
| 650 | 9.3 | 8.4 | 7.4 | 6.5 | 5.6 | 4.7 | 3.8 | | | | | | |

Weiland 12-71 Drive Ratio & Estimated Boost Chart (PSI)

WATER PUMPS

| Engine | Drive Ratio (Overdriven) | | | | | | | | | | | | |
|--------|--------------------------|--------|--------|--------|--------|--------|------|--------|--------|--------|--------|--------|--------|
| | 1.30:1 | 1.25:1 | 1.20:1 | 1.15:1 | 1.10:1 | 1.05:1 | 1:1 | 0.95:1 | 0.90:1 | 0.85:1 | 0.80:1 | 0.75:1 | 0.70:1 |
| | 30% | 25% | 20% | 15% | 10% | 5% | 0% | -5% | -10% | -15% | -20% | -25% | -30% |
| 454 | 21.7 | 20.3 | 18.9 | 17.5 | 16.1 | 14.7 | 13.3 | 11.9 | 10.5 | 9.1 | 7.7 | 6.3 | 4.9 |
| 502 | 18.2 | 17.0 | 15.7 | 14.4 | 13.2 | 11.9 | 10.6 | 9.4 | 8.1 | 6.8 | 5.6 | 4.3 | 3.0 |
| 540 | 15.9 | 14.7 | 13.6 | 12.4 | 11.2 | 10.0 | 8.8 | 7.7 | 6.5 | 5.3 | 4.1 | 3.0 | |
| 600 | 12.8 | 11.8 | 10.7 | 9.7 | 8.6 | 7.5 | 6.5 | 5.4 | 4.4 | 3.3 | 2.3 | | |
| 650 | 10.7 | 9.7 | 8.8 | 7.8 | 6.8 | 5.8 | 4.9 | 3.9 | | | | | |


Weiland 14-71 Drive Ratio & Estimated Boost Chart (PSI)

PART# TO PAGE INDEX

| Engine | Drive Ratio (Overdriven) | | | | | | | | | | | | |
|--------|--------------------------|--------|--------|--------|--------|--------|------|--------|--------|--------|--------|--------|--------|
| | 1.30:1 | 1.25:1 | 1.20:1 | 1.15:1 | 1.10:1 | 1.05:1 | 1:1 | 0.95:1 | 0.90:1 | 0.85:1 | 0.80:1 | 0.75:1 | 0.70:1 |
| | 30% | 25% | 20% | 15% | 10% | 5% | 0% | -5% | -10% | -15% | -20% | -25% | -30% |
| 454 | 23.5 | 22.1 | 20.6 | 19.1 | 17.7 | 16.2 | 14.7 | 13.2 | 11.8 | 10.3 | 8.8 | 7.4 | 5.9 |
| 502 | 19.9 | 18.5 | 17.2 | 15.9 | 14.6 | 13.2 | 11.9 | 10.6 | 9.2 | 7.9 | 6.6 | 5.2 | 3.9 |
| 540 | 17.4 | 16.2 | 15.0 | 13.7 | 12.5 | 11.3 | 10.0 | 8.8 | 7.6 | 6.3 | 5.1 | 3.8 | |
| 600 | 14.2 | 13.1 | 12.0 | 10.9 | 9.8 | 8.7 | 7.6 | 6.4 | 5.3 | 4.2 | 3.1 | | |
| 650 | 12.0 | 11.0 | 10.0 | 8.9 | 7.9 | 6.9 | 5.8 | 4.8 | 3.8 | | | | |



SUPERCHARGER DIMENSIONS

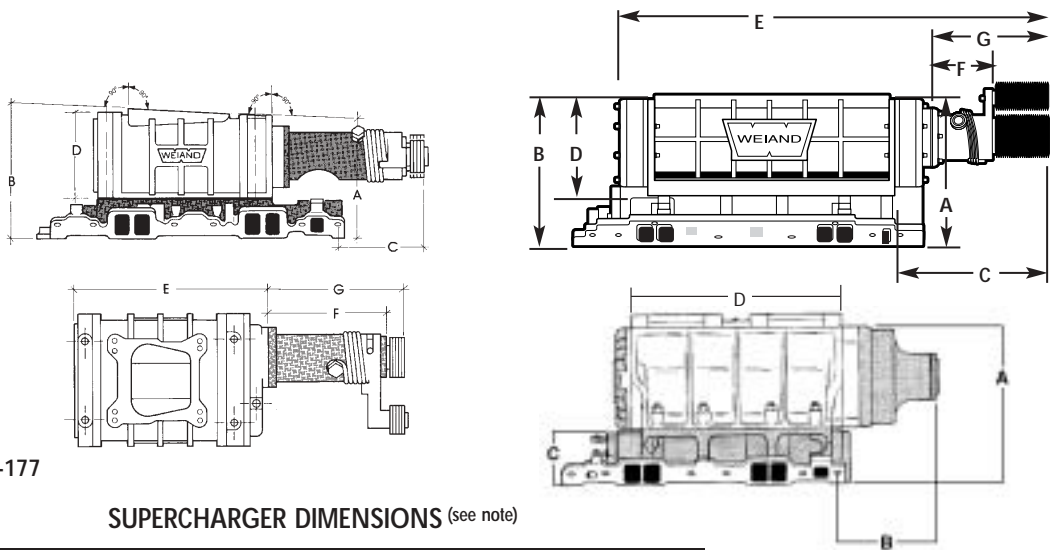

142-177

SUPERCHARGER DIMENSIONS (see note)

| SIZE | APPLICATION | A | B | C | D | E | F | G |
|-------|--------------------------------|----------|-----------|---------|----------|-----------|----------|----------|
| 142* | Chevy S/B, Long Nose, '86 only | 7-5/8" | 8-15/16" | 9-1/4" | 5-5/8" | 12-15/16" | 10-1/16" | 11-1/8" |
| 142* | Chevrolet S/B, Long Nose | 7-5/8" | 8-15/16" | 8-1/4" | 5-5/8" | 12-15/16" | 9-1/16" | 10-1/8" |
| 142* | Chevrolet S/B, Short Nose | 7-5/8" | 8-15/16" | 7" | 5-5/8" | 12-15/16" | 7-13/16" | 8-7/8" |
| 177 | Chevrolet S/B, Long Nose | 9-9/16" | 10-15/16" | 8-9/16" | 5-15/16" | 14-13/16" | 7-1/16" | 8-11/16" |
| 177 | Chevrolet S/B, Short Nose | 9-9/16" | 10-15/16" | 7-5/16" | 5-15/16" | 14-13/16" | 5-13/16" | 7-7/16" |
| 177* | Chevrolet B/B, Long Nose | 9-1/4" | 10-5/8" | 7-7/8" | 5-15/16" | 14-13/16" | 9-1/16" | 10-1/8" |
| 177* | Chevrolet B/B, Short Nose | 9-1/4" | 10-5/8" | 6-5/8" | 5-15/16" | 14-13/16" | 7-13/16" | 8-7/8" |
| 256 | Chevrolet B/B, 256 | 10-1/2" | 10-1/2" | 9-1/4" | 6-1/8" | 19-1/2" | 5" | 7-1/2" |
| 6-71 | Chevrolet S/B | 11-3/16 | 8-3/8 | 3-11/16 | 15" | | | |
| | Chevrolet B/B, std. deck | 11-15/16 | 6-3/16 | 4-7/16 | 15" | | | |
| | Chevrolet B/B, tall deck | 12-5/16 | 6-3/16 | 4-13/16 | 15" | | | |
| | Chrysler 392 Hemi | 11-1/4 | 10-3/16 | 3-11/16 | 15" | | | |
| 8-71 | Chevrolet S/B | 11-9/16 | 8-3/8 | 3-11/16 | 16" | | | |
| | Chevrolet B/B, std. deck | 12-1/8 | 7-3/16 | 4-7/16 | 16" | | | |
| | Chevrolet B/B, tall deck | 12-1/2 | 7-3/16 | 4-13/16 | 16" | | | |
| | Chrysler 426 Hemi | 12-5/16 | 12-1/4 | 4-1/2 | 16" | | | |
| 10-71 | Chevrolet B/B, std deck | 12-1/8 | 8-3/16 | 4-7/16 | 17" | | | |
| | Chevrolet B/B, tall deck | 12-1/2 | 8-3/16 | 4-13/16 | 17" | | | |
| 12-71 | Chevrolet B/B, std deck | 12-1/8 | 9-3/16 | 4-7/16 | 18" | | | |
| | Chevrolet B/B, tall deck | 12-1/2 | 9-3/16 | 4-13/16 | 18" | | | |
| 14-71 | Chevrolet B/B std deck | 12-1/8 | 10-3/16 | 4-7/16 | 19" | | | |
| | Chevrolet B/B tall deck | 12-1/2 | 10-3/16 | 4-13/16 | 19" | | | |

(*) For 10-rib dimensions add .600" to dimension C & G.

NOTE: 142 and 177 BB dimensions are with 6-rib pulley; 177 SB dimensions are with 10-rib pulley; 256 dimensions are with 16-rib pulley.

Dimensions "A & B" listed for the 256 are less carburetor adapter. Add 1" to this dimension for carburetor adapter.

Dimension "A" for the 6-71-8-71 is less adapter. Add 1" for carburetor adapters with the exception of adapter part number 7164 which is 2-3/4".

MANIFOLDS

SUPERCHARGERS

WATER PUMPS

PART# TO PAGE INDEX

Tech Line: 270-781-9741

39

SUPERCHARGERS

142 & 177 PRO-STREET KITS

WEIAND 142 PRO-STREET SUPERCHARGER KITS

MANIFOLDS

SUPERCHARGERS

WATER PUMPS

PART# TO PAGE INDEX



IT'S YOUR ENGINE...ONLY STRONGER!

Weiland Pro Street supercharger kits are engineered to give you a 25% to 40% gain in power - while maintaining outstanding streetability. All Weiland blowers feature 100% new parts (no remanufactured components), including new thick-wall cases and rotors to eliminate high-RPM flex.

In addition, a low-profile design is available to provide added hood clearance in tight engine compartments. This system is a practical addition to any performance or tow vehicle where hood clearance and/or the use of a long water pump and three v-belts are required. It will fit under most stock hoods on trucks and musclecars and almost always under a small cowl induction hood.

All superchargers are built in Weiland's state-of-the-art supercharger manufacturing cell, each supercharger is 100% boost tested to help you squeeze the maximum power and efficiency out of your Weiland supercharger.

The latest CNC machining techniques and quality control are used to maintain the tightest tolerances for smooth operation and maximum reliability.

Weiland 142 superchargers are available for both small- and big block Chevrolet, including an application-specific kit for 1993-1995 GM Trucks. The low-profile small-block Chevrolet and GM Truck blowers feature Teflon-tipped rotors. Weiland 256 superchargers are available for Chevrolet Big Block.

142 Pro-Street Supercharger Kits

| Application | Teflon | Nose Style | Pulley Width | Satin P/N | Polished P/N | Factory Drive Ratio |
|--|--------|------------|--------------|--------------|---------------|---------------------|
| Chevrolet Small Block (Universal) ^{1, 2, 3, 5, 6} | N | Long | 6-RIB | 6500-1 | 6510-1 | 1.95:1 |
| Chevrolet Small Block (Low Profile) ⁷ | Y | Long | 10-RIB | 7740-1 | 7750-1 | 1.95:1 |
| Chevrolet Small Block (1969-85) ^{1, 3, 5, 6} | N | Long | 6-RIB | 6502-1 | 6507-1 | 1.95:1 |
| Chevrolet Small Block (1962-68) ^{1, 3, 5, 6} | N | Short | 6-RIB | 6503-1 | 6508-1 | 1.95:1 |
| Chevrolet Small Block (1986) ^{1, 3, 4, 5} | N | X-Long | 6-RIB | 6504-1 | 6509-1 | 1.95:1 |
| Chevrolet/GMC Truck, Automatic Transmission, TBI ¹³ | Y | N/A | 6-RIB | 77-144CSBE-1 | 77-144CSBEP-1 | (14) |

- 1 If the crankshaft has a one- or a two-V-belt accessory pulley use a "short-nose" kit. If the crankshaft has a three-V-belt accessory drive pulley, use a "long-nose" kit. "Long nose" kits fit a majority of short and long water pump applications, excluding late model applications with a serpentine accessory drive system. Select a "short nose" kit for tight clearance situations (such as street rods). "Short nose" kits do not fit long water pump accessory setups.
- 2 Slight elongation of four center bolt holes may be required to install on 1987-later cast-iron heads
- 3 Does not fit 1984-96 Corvettes
- 4 Fits vehicles with both serpentine and V-belts
- 5 Does not fit 1993-later LT-1 heads
- 6 Does not fit engines originally equipped with four v-belts; use kits 6504-1 and 6509-1
- 7 Low profile design; P/N 7740-1 is 0.750" lower overall than P/N 6500-1; P/N 7741-1 is 2" lower overall than P/N 6521-1
- 13 Kit retains factory air cleaner, throttle body, and all accessories; includes computer chip for proper operation on stock 1993-95 Chevrolet/GMC trucks
- 14 Supercharger kit is supplied with various drive ratios per application



WEIAND 177 PRO-STREET SUPERCHARGER KITS



Weiland Pro-Street supercharger kits are engineered to give you a 25% to 40% gain in power - while maintaining outstanding streetability. All Weiland blowers feature 100% new parts (no remanufactured components), including new thick-wall cases and rotors to eliminate high-RPM flex.

In addition, a low-profile design is available to provide added hood clearance in tight engine compartments. This system is a practical addition to any performance or tow vehicle where hood clearance and/or the use of a long water pump and three v-belts are required. It will fit under most stock hoods on trucks and muscle cars and almost always under a small cowl induction hood.

All superchargers are built in Weiland's state-of-the-art supercharger manufacturing cell, each supercharger is 100% boost tested to help you squeeze the maximum power and efficiency out of your Weiland supercharger.

The latest CNC machining techniques and quality control are used to maintain the tightest tolerances for smooth operation and maximum reliability.

Weiland 177 superchargers are available for both small- and big block Chevrolet, and small-block Ford. The low-profile big-block Chevrolet and small-block Ford feature Teflon-tipped rotors.

177 Pro-Street Supercharger Kits

| Application | Teflon | Nose Style | Pulley Width | Satin P/N | Polished P/N | Factory Drive Ratio |
|--|--------|-------------|--------------|--------------|--------------|---------------------|
| Chevrolet Small Block (1969-86) ^{1, 2, 3, 5, 6} | N | Long | 10-RIB | 6512-1 | 6513-1 | 1.71:1 |
| Chevrolet Small Block (1962-68) ^{1, 2, 3, 5, 6} | N | Short | 10-RIB | 6505-1 | 6506-1 | 1.71:1 |
| Chevrolet Big Block (Standard Deck, Oval Port) ¹ | N | Long | 6-RIB | 6521-1 | 6520-1 | 1.95:1 |
| Chevrolet Big Block (Standard Deck, Oval Port) ¹ | N | Short | 6-RIB | 6522-1 | 6523-1 | 1.95:1 |
| Chevrolet Big Block (Standard Deck, Rectangular Port) ¹ | N | Long | 6-RIB | 6530-1 | 6531-1 | 1.95:1 |
| Chevrolet Big Block (Standard Deck, Rectangular Port) ¹ | N | Short | 6-RIB | 6532-1 | 6533-1 | 1.95:1 |
| Chevrolet Big Block (Standard Deck; Low Profile) ^{7, 8, 11} | Y | Long | 10-RIB | 7741-1 | 7751-1 | 1.95:1 |
| Ford Small Block (289-302) ⁹ | Y | Offset Ford | 10-RIB | 77-174FSBP-1 | 77-174FSBP-1 | 1.60:1 |

- 1 If the crankshaft has a one- or two-V-belt accessory pulley use a "short-nose" kit. If the crankshaft has a three-V-belt accessory drive pulley, use a "long-nose" kit. "Long nose" kits fit a majority of short and long water pump applications, excluding late model applications with a serpentine accessory drive system. Select a "short nose" kit for tight clearance situations (such as street rods). "Short nose" kits do not fit long water pump accessory setups.
- 2 Slight elongation of four center bolt holes may be required to install on 1987-later cast-iron heads
- 3 Does not fit 1984-96 Corvettes
- 5 Does not fit 1993-later LT-1 heads
- 6 Does not fit engines originally equipped with four v-belts; use kits 6504-1 and 6509-1
- 7 Low profile design; P/N 7740-1 is 0.750" lower overall than P/N 6500-1; P/N 7741-1 is 2" lower overall than P/N 6521-1
- 8 Manifold will fit rectangular port, and oval port with "trim-to-fit" gasket
- 9 1969 and earlier models require the use of crank spacer (P/N 90683)
- 11 Will work up to 3 accessory V-belts, with a short or long water pump

MANIFOLDS

SUPERCHARGERS

WATER PUMPS

PART# TO PAGE INDEX

Tech Line: 270-781-9741

41

SUPERCHARGERS

250 & 256 PRO-STREET KITS, 6-71 & 8-71 KITS

WEIAND 250 & 256 PRO-STREET SUPERCHARGER KITS

MANIFOLDS

SUPERCHARGERS

WATER PUMPS

PART# TO PAGE INDEX



IT'S YOUR ENGINE...ONLY STRONGER!

Weiland Pro Street supercharger kits are engineered to give you a 25% to 40% gain in power - while maintaining outstanding streetability. All Weiland blowers feature 100% new parts (no remanufactured components), including new thick-wall cases and rotors to eliminate high-RPM flex.

All superchargers are built in Weiland's state-of-the-art supercharger manufacturing cell, each supercharger is 100% boost tested to help you squeeze the maximum power and efficiency out of your Weiland supercharger.

The latest CNC machining techniques and quality control are used to maintain the tightest tolerances for smooth operation and maximum reliability.

Weiland 250 superchargers are available for both small- and big block Chevrolet. Weiland 256 superchargers are available for Chevrolet Big Block.

250 Pro-Street Supercharger Kits

| Application | Teflon | Pulley Style | Satin P/N | Polished P/N | Factory Drive Ratio |
|--------------------------------------|--------|--------------|-------------|--------------|---------------------|
| Chevrolet Small Block ¹⁰ | Y | Gilmer | 77-250CSB-1 | 77-250CSBP-1 | 1.33:1 |
| Chevrolet Big Block ^{10,12} | Y | Gilmer | N/A | 77-250CBBP-1 | 1.71:1 |

256 Pro-Street Supercharger Kits

| Application | Teflon | Nose Style | Pulley Width | Satin P/N | Polished P/N | Factory Drive Ratio |
|--|--------|------------|--------------|-----------|--------------|---------------------|
| Chevrolet Big Block (Std Deck, Rectangular Port) | N | Long | 16-RIB | 6540-1 | 6541-1 | 1.40:1 |

¹⁰ Will not fit with long water pump

¹² GM HEI distributor cap must be trimmed slightly to clear rear of blower housing



WEIAND 6-71 & 8-71 SUPERCHARGER KITS



*Snout now comes installed

Add up to 50% more power with a Weiland 6-71 or 8-71. For over 40 years, Weiland's superchargers have been used extensively in dragsters, boats, Bonneville cars and wild street cars.

Built in Weiland's state-of-the-art supercharger manufacturing cell, each supercharger is 100% boost tested to help you squeeze the maximum power and efficiency out of your Weiland supercharger.

The latest CNC machining techniques and quality control are used to maintain the tightest tolerances for smooth operation and maximum reliability.

Legendary power and appearance...it is what supercharging the Weiland way is all about.



6-71 Street Supercharger Kits

| Application | Drive Pitch | Satin P/N | Polished P/N | Drive Ratio w/Included Pulley Set |
|--|-------------|-----------|--------------|-----------------------------------|
| Chevrolet Small Block (1955-86) ¹ | 1/2" | 7482 | 7482P | 10.5% underdriven |
| | 8mm | 7487 | 7487P | 11.5% underdriven |
| Chevrolet Big Block (Std Deck) ¹ | 1/2" | 7483 | 7483P | 7.9% underdriven |
| | 8mm | 7488 | 7488P | 8.5% underdriven |
| Chrysler 392 HEMI ^{2, 3} | 1/2" | 7481 | 7481P | 10.5% underdriven |

8-71 Street Supercharger Kits

| Application | Drive Pitch | Satin P/N | Polished P/N | Drive Ratio w/Included Pulley Set |
|--|-------------|-----------|--------------|-----------------------------------|
| Chevrolet Small Block (1955-86) ¹ | 8mm | 7185 | 7185P | 14.3% underdriven |
| Chevrolet Big Block (Std Deck) ¹ | 8mm | 7186 | 7186P | 11.5% underdriven |
| Chrysler 426 HEMI | 8mm | 7180 | 7180P | 11.5% underdriven |

1 Requires "small cap" distributor to clear blower housing
 2 Requires stock replacement harmonic damper for correct pulley alignment
 3 Requires Weiland water pump kit P/N 8213 or P/N 8213P

MANIFOLDS

SUPERCHARGERS

WATER PUMPS

PART# TO PAGE INDEX

Tech Line: 270-781-9741

SUPERCHARGERS

BELTS AND PULLEYS

SUPERCHARGER BELTS



MANIFOLDS

SUPERCHARGERS

WATER PUMPS

PART# TO PAGE INDEX

Belts for Weiland Pro-Street Superchargers - Chevrolet Engines

| Belt P/N | Number of Ribs | Length | S/B 142 | | | B/B (Std. Deck) | B/B (Std. Deck) 177 (Low Profile) | B/B (Std. Deck) 256 |
|----------|----------------|--------|-----------------|-----------------|----------------------|-----------------|-----------------------------------|---------------------|
| | | | S/B 142 | (Low Profile) | S/B 177 | | | |
| 6700 | 6 | 47.0" | 6" Drive Pulley | N/A | N/A | N/A | N/A | N/A |
| 6800 | 10 | 47.0" | 6" Drive Pulley | N/A | N/A | N/A | N/A | N/A |
| 6701WIN | 6 | 49.4" | 7" Drive Pulley | N/A | N/A | N/A | N/A | N/A |
| 6801 | 10 | 49.4" | 7" Drive Pulley | N/A | N/A | N/A | N/A | N/A |
| 90824 | 6 | 45.5" | N/A | 6" Drive Pulley | N/A | N/A | N/A | N/A |
| 90825 | 10 | 45.5" | N/A | 6" Drive Pulley | N/A | N/A | N/A | N/A |
| 90835 | 10 | 52.17" | N/A | N/A | Small Block Ford Kit | N/A | N/A | N/A |
| 91162 | 10 | 48.25" | N/A | N/A | 6" Drive Pulley | N/A | N/A | N/A |
| 6806WIN | 10 | 50.4" | N/A | N/A | 6" Drive Pulley | N/A | N/A | N/A |
| 6807 | 10 | 53.3" | N/A | N/A | 7" Drive Pulley | N/A | N/A | N/A |
| 6702 | 6 | 53.3" | N/A | N/A | N/A | 6" Drive Pulley | N/A | N/A |
| 6802WIN | 10 | 53.3" | N/A | N/A | N/A | 6" Drive Pulley | N/A | N/A |
| 6703 | 6 | 55.0" | N/A | N/A | N/A | 7" Drive Pulley | N/A | N/A |
| 6803WIN | 10 | 55.0" | N/A | N/A | N/A | 7" Drive Pulley | N/A | N/A |
| 90826 | 6 | 48.5" | N/A | N/A | N/A | N/A | 6" Drive Pulley | N/A |
| 90827 | 10 | 50.5" | N/A | N/A | N/A | N/A | 6" Drive Pulley | N/A |
| 6602 | 16 | 54.5" | N/A | N/A | N/A | N/A | N/A | 6" Drive Pulley |

Belts for Weiland 250, 6-71 - 8-71 Superchargers

| Belt P/N | Pitch | Length | XX-XX = Min - Max Pulley Tooth Count | | | | |
|----------|-------|--------|--------------------------------------|---------------|---------------------|---------------------------------|--------------------------|
| | | | 250 Chev. S/B | 250 Chev. B/B | 6-71-8-71 Chev. S/B | 6-71-8-71 Chev. B/B (Std. Deck) | 6-71-8-71 Chry. 392 HEMI |
| 7006 | 1/2" | 54.0" | N/A | N/A | 64-70 | N/A | N/A |
| 7007 | 1/2" | 56.0" | N/A | N/A | 70-78 | 64-66 | 65-69 |
| 7008 | 1/2" | 57.0" | N/A | N/A | 74-78 | 64-70 | 69-73 |
| 7013 | 1/2" | 58.5" | N/A | N/A | N/A | 68-70 | 75-78 |
| 7009 | 1/2" | 60.0" | N/A | N/A | N/A | 75-78 | N/A |
| 7100WIN | 8mm | 56.7" | N/A | N/A | 108-124 | 105-116 | N/A |
| 91095 | 8mm | 1280mm | 90-104 | N/A | N/A | N/A | N/A |
| 93266 | 8mm | 1440mm | N/A | 106-120 | N/A | N/A | N/A |





SUPERCHARGER PULLEYS

Weiland Pro-Street Driven Pulleys (Serpentine)

| Diameter (Inches) | Part# (6-RIB) | Part# (10-RIB) | Part# (16-RIB) | Drive Pulley Diameter (Inches) and Ratio (Overdriven) | | |
|----------------------|------------------|-------------------|-------------------|---|---------------|---------------|
| | | | | 7.00 | 6.50 | 6.00 |
| 2.50 | 90636 | 90634 | N/A | 2.80:1 (180%) | 2.60:1 (160%) | 2.40:1 (140%) |
| 2.66 | 90534 | 90541 | N/A | 2.63:1 (163%) | 2.44:1 (144%) | 2.26:1 (126%) |
| 2.85 | 6790 | 6890 | N/A | 2.45:1 (145%) | 2.27:1 (127%) | 2.10:1 (110%) |
| 3.05 | 6791 | 6891 | 6691* | 2.30:1 (130%) | 2.13:1 (113%) | 1.97:1 (97%) |
| 3.23 | 6792 | 6892 | 6692* | 2.17:1 (117%) | 2.01:1 (101%) | 1.86:1 (86%) |
| 3.48 | 6793 | 6893 | 6693* | 2.01:1 (101%) | 1.87:1 (87%) | 1.72:1 (72%) |
| 3.73 | 6794 | N/A | 6694 | 1.88:1 (88%) | 1.74:1 (74%) | 1.61:1 (61%) |
| 3.98 | N/A | N/A | 6695 | 1.76:1 (76%) | 1.63:1 (63%) | 1.51:1 (51%) |
| 4.10 | 90721 | 90740 | N/A | 1.71:1 (71%) | 1.59:1 (59%) | 1.46:1 (46%) |
| 4.23 | N/A | N/A | 6696 | 1.65:1 (65%) | 1.54:1 (54%) | 1.42:1 (42%) |

* For use with 6" Drive pulley; for high boost applications, use 6.5" drive pulley



MANIFOLDS

SUPERCHARGERS

Weiland Pro-Street Lower Drive Pulleys (Serpentine)

| Blower Size | Application | 6" Drive Pulley | | | 6.5" Drive Pulley | | 7" Drive Pulley | |
|----------------|-------------------|-----------------|------------|------------|-------------------|-----------|-----------------|--|
| | | 6-RIB P/N | 10-RIB P/N | 16-RIB P/N | 16-RIB P/N | 6-RIB P/N | 10-RIB P/N | |
| 142 | SB 1986 only | 6714 | N/A | N/A | N/A | N/A | N/A | |
| 142/144SB | w/Long Nose | 6710 | 6810WIN | N/A | N/A | 6713 | 6813 | |
| 142 | SB w/Short Nose | 6711 | 6811 | N/A | N/A | 6712 | N/A | |
| 144 | SB Chev/GMC truck | 90592 | N/A | N/A | N/A | N/A | N/A | |
| 177 | SB w/Long Nose | 6710 | 6810WIN | N/A | N/A | 6713 | 6813 | |
| 177 | SB w/Short Nose | 6711 | 6811WIN | N/A | N/A | 6712 | N/A | |
| 174/177BB | w/Long Nose | 6720 | N/A | N/A | N/A | 6723 | 6823WIN | |
| 177 | BB w/Short Nose | 6721 | N/A | N/A | N/A | N/A | N/A | |
| 256 | BB | N/A | N/A | 6620 | 6623 | N/A | N/A | |



WATER PUMPS

Weiland Pro-Street Drive and Driven Pulleys (250 Gilmer Style)

| Drive (Bottom) Pulley Tooth Count | Pulley P/N | Driven (Top) Pulley Tooth Count | | | | | |
|--|------------|---------------------------------|----------------|----------------|----------------|----------------|----------------|
| | | 34 | 36 | 39 | 42 | 45 | 48 |
| | | 91005 | 91004 | 91003 | 91002 | 10016 | 00016 |
| 56 | 91097 | 2.65:1 165% | 2.56:1 156% | 2.44:1 144% | 2.33:1 133% | 2.24:1 124% | 2.17:1 117% |
| 72 | 91089 | 3.12:1 212% | 3.00:1 200% | 2.85:1 185% | 2.71:1 171% | 2.60:1 160% | 2.50:1 150% |



PART# TO PAGE INDEX

SUPERCHARGERS

PULLEYS AND SERVICE PARTS

1/2" Pitch Drive Pulleys and Ratios

MANIFOLDS

SUPERCHARGERS



| | | Driven (Top) Pulley Tooth Count | | | | | | | | |
|-----------------------------------|----|---------------------------------|---------------|---------------|---------------|---------------|----------------|----------------|----------------|----------------|
| | | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | |
| | | Pulley P/N | | | | | | | | |
| | | 7029-32 | 7029-33 | 7029-34 | 7029-35 | 7029-36 | 7029-37 | 7029-38 | 7029-39 | |
| Drive (Bottom) Pulley Tooth Count | 32 | 7029-32 | 1.00:1 0% | 0.97:1 -3% | 0.94:1 -6% | 0.91:1 -9% | 0.89:1 -11% | 0.86:1 -14% | 0.84:1 -16% | 0.82:1 -18% |
| | 33 | 7029-33 | 1.03:1 -3% | 0% | 0.97:1 -3% | 0.94:1 -6% | 0.92:1 -8% | 0.89:1 -11% | 0.87:1 -13% | 0.85:1 -15% |
| | 34 | 7029-34 | 1.06:1 -6% | 1.03:1 -3% | 0% | 0.97:1 -3% | 0.94:1 -6% | 0.92:1 -8% | 0.89:1 -11% | 0.87:1 -13% |
| | 35 | 7029-35 | 1.09:1 9% | 1.06:1 -6% | 1.03:1 -3% | 0% | 0.97:1 -3% | 0.95:1 -5% | 0.92:1 -8% | 0.90:1 -10% |
| | 36 | 7029-36 | 1.13:1 13% | 1.09:1 9% | 1.06:1 -6% | 1.03:1 -3% | 0% | 0.97:1 -3% | 0.95:1 -5% | 0.92:1 -8% |
| | 37 | 7029-37 | 1.16:1 16% | 1.12:1 12% | 1.09:1 9% | 1.06:1 -6% | 1.03:1 -3% | 0% | 0.97:1 -3% | 0.95:1 -5% |
| | 38 | 7029-38 | 1.19:1 19% | 1.15:1 15% | 1.12:1 12% | 1.09:1 9% | 1.06:1 -6% | 1.03:1 -3% | 0% | 0.97:1 -3% |
| | 39 | 7029-39 | 1.22:1 22% | 1.18:1 18% | 1.15:1 15% | 1.11:1 11% | 1.08:1 8% | 1.05:1 -5% | 1.03:1 -3% | 0% |

8mm Pitch Drive Pulleys and Ratios

WATER PUMPS

PART# TO PAGE INDEX




| | | Driven (Top) Pulley Tooth Count | | | | | | | | | | |
|-----------------------------------|----|---------------------------------|---------------|---------------|---------------|---------------|---------------|---------------|----------------|----------------|----------------|----------------|
| | | 50 | 51 | 52 | 53 | 54 | 55 | 57 | 59 | 61 | 63 | |
| | | Pulley P/N | | | | | | | | | | |
| | | 7109-50 | 7109-51 | 7109-52 | 7109-53 | 7109-54 | 7109-55 | 7109-57 | 7109-59 | 7109-61 | 7109-63 | |
| Drive (Bottom) Pulley Tooth Count | 50 | 7109-50 | 0% | 0.98:1 -2% | 0.96:1 -4% | 0.94:1 -6% | 0.93:1 -7% | 0.91:1 -9% | 0.88:1 -12% | 0.85:1 -15% | 0.82:1 -18% | 0.79:1 -21% |
| | 51 | 7109-51 | 1.02:1 2% | 0% | 0.98:1 -2% | 0.96:1 -4% | 0.94:1 -6% | 0.93:1 -7% | 0.89:1 -11% | 0.86:1 -14% | 0.84:1 -16% | 0.81:1 -19% |
| | 52 | 7109-52 | 1.04:1 4% | 1.02:1 2% | 0% | 0.98:1 -2% | 0.96:1 -4% | 0.95:1 -5% | 0.91:1 -9% | 0.88:1 -12% | 0.85:1 -15% | 0.83:1 -17% |
| | 53 | 7109-53 | 1.06:1 -6% | 1.04:1 4% | 1.02:1 2% | 0% | 0.98:1 -2% | 0.96:1 -4% | 0.93:1 -7% | 0.90:1 -10% | 0.87:1 -13% | 0.84:1 -16% |
| | 54 | 7109-54 | 1.08:1 8% | 1.06:1 -6% | 1.04:1 4% | 1.02:1 2% | 0% | 0.98:1 -2% | 0.95:1 -5% | 0.92:1 -8% | 0.89:1 -11% | 0.86:1 -14% |
| | 55 | 7109-55 | 1.10:1 10% | 1.08:1 8% | 1.06:1 -6% | 1.04:1 4% | 1.02:1 2% | 0% | 0.96:1 -4% | 0.93:1 -7% | 0.90:1 -10% | 0.87:1 -13% |
| | 57 | 7109-57 | 1.14:1 14% | 1.12:1 12% | 1.10:1 10% | 1.08:1 8% | 1.06:1 -6% | 1.04:1 4% | 0% | 0.97:1 -3% | 0.93:1 -7% | 0.90:1 -10% |
| | 59 | 7109-59 | 1.18:1 18% | 1.16:1 16% | 1.13:1 13% | 1.11:1 11% | 1.09:1 9% | 1.07:1 7% | 1.04:1 4% | 0% | 0.97:1 -3% | 0.94:1 -6% |
| | 61 | 7109-61 | 1.22:1 22% | 1.20:1 20% | 1.17:1 17% | 1.15:1 15% | 1.13:1 13% | 1.11:1 11% | 1.07:1 7% | 1.03:1 -3% | 0% | 0.97:1 -3% |
| | 63 | 7109-63 | 1.26:1 26% | 1.24:1 24% | 1.21:1 21% | 1.19:1 19% | 1.17:1 17% | 1.15:1 15% | 1.11:1 11% | 1.07:1 7% | 1.03:1 -3% | 0% |



SUPERCHARGER SERVICE PARTS

6-71 w/ 1/2" pitch drive

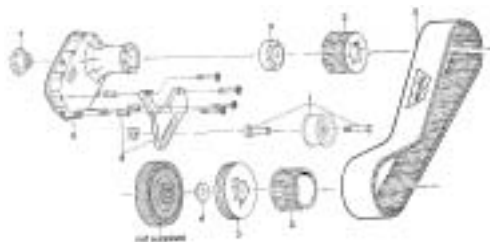

Components Parts List for 1/2" Pitch Drives


(Listed parts are included in 6-71, 1/2" pitch kits)

| REF. NO | DESCRIPTION | PART NO. |
|---------|---|-------------|
| 1 | Idler pulley assembly | 7027 |
| 2 | 1/2" pitch drive pulley, specify tooth count, see page 214. (2-1/4" register) | 7029 |
| 3a | 2V accessory drive pulley (1-1/4" thick, 2-1/4" register), 392 Hemi only | 7083 |
| 3b | 2V accessory drive pulley (1-1/4" thick, 2-1/4" register), SB & BB Chevy only | 7036 |
| 4a | Locating pilot, SB Chevrolet accessory drive pulley | 7037 |
| 4b | Locating pilot, BB Chevrolet accessory drive pulley | 7038 |
| 5 | Drive belt, 1/2" pitch, Gilmer style | See page 44 |
| 6 | Gear cover/nose drive assy. (6-13/16" long, 2-1/4" register) | 7024 |
| 7 | Coupler-nose drive to supercharger | 7035 |
| 8a | Idler pulley bracket, SB Chevrolet 1/2" pitch (incl. hardware) | 7065 |
| 8b | Idler pulley bracket, BB Chevrolet 1/2" pitch (incl. hardware) | 7066 |
| 8c | Idler pulley bracket, 392 Chrysler Hemi 1/2" pitch (incl. hardware) | 7064 |
| 9a | 2" spacer-upper pulley to nose drive, Chevrolet BB (2-1/4" register) | 7055 |
| 9b | 1/2" spacer-upper pulley to nose drive, 392 Hemi (2-1/4" register) | 7053WIN |
| 10 | T-nut | W108 |

For polished components, add a "P" after the part number when ordering.

All WEIAND drives are designed to be used with a stock harmonic dampner. The use of an aftermarket heavy duty steel dampner is highly recommended. Stock cast iron dampners are subject to fracture when used with a supercharger with a Gilmer style drive belt. All of WEIAND'S street 6-71 supercharger kits are supplied with a two V-groove pulley accessory drive and are designed to be used only with a short water pump. If your engine is a 1969 or later small block or a big block with a long water pump you will need to switch over to a short water pump and the appropriate accessory mounting brackets or applicable aftermarket brackets.

6-71 - 14-71 w/ 8mm pitch drive

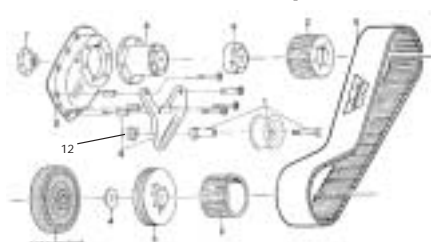

Components Parts List for 8mm Pitch Drives

(Listed parts are included in 6-71 & 8-71 8mm pitch kits)

| REF. NO | DESCRIPTION | PART NO. |
|---------|---|-------------|
| 1 | Idler pulley assembly | 7027 |
| 2 | 8 mm drive pulley, specify tooth count | See page 46 |
| 3a | 2V accessory drive pulley (1-1/4" thick, 2" register). Chevrolet street 6-71-14-71 | 7113WIN |
| 3b | 2V accessory drive pulley (1-1/4" thick, 2" register). Chrysler 426 Hemi | 7084 |
| 3c | 3V accessory drive pulley 2" register | 7114WIN |
| 4a | Locating pilot, acc. dr. pulley, SB Chevy | 7037 |
| 4b | Locating pilot, acc. dr. pulley, BB Chevy | 7038 |
| 5 | Drive belt, 8mm pitch, 1440mm x 75mm | 7100WIN |
| 6a | Nose drive assembly (3-3/4" long, 2" register), SB Chevrolet only | 7103WIN |
| 6b | Nose drive assembly (4-13/16" long, 2" register), SB/BB Chevy 6-71, BB Chevy, 426 Chrysler Hemi 8-71 up | 7104WIN |
| 7a | Coupler-nose drive to supercharger, SB Chevy | 7034 |
| 7b | Coupler-nose drive for 6-71 SB/BB Chevy, 8-71 up BB Chevy/426 Hemi | 7035 |
| 8a | Idler pulley bracket*, SB Chevy 8-71 | 7069 |
| 8b | Idler pulley bracket*, SB Chevrolet 6-71 | 7067 |
| 8c | Idler pulley bracket*, BB Chevrolet 6-71 | 7068 |
| 8d | Idler pulley bracket*, BB Chevy for 7186, 7186P, 7190P, 7195P | 7070 |
| 8e | Idler pulley bracket*, 426 Chrysler Hemi | 7073P |
| 8f | Idler pulley bracket*, BB Chevy for 7191P, 7186P, 7196P, 7194 | 7071P |
| 8g | Idler pulley bracket*, BB Chevy for 7192P, 7193P, 7197 | 7072P |
| 9a | 1" spacer-upper pulley to nose drive, BB Chevrolet Street only (2" register) | 7106WIN |
| 9b | 2" spacer-upper pulley to nose drive, 6-71 SB/BB Chevy (2" register) | 7108WIN |
| 11 | Front gear cover (depth: 2") | 7039 |
| 12 | T-nut (*) Includes hardware | W108 |

MANIFOLDS

SUPERCHARGERS

WATER PUMPS

PART# TO PAGE INDEX

Tech Line: 270-781-9741

47

SUPERCHARGERS

SERVICE PARTS

SUPERCHARGER SERVICE PARTS

MANIFOLDS



7476P

Supercharger Case Assemblies

| Application | Satin | Polished |
|--|----------|----------|
| Chevy S/B, 142 supercharger, less nose | 6010-1* | 6011-1* |
| Chevy S/B, 144 supercharger, less nose | 90920-1* | 90921-1* |
| Chevy S/B, 174 supercharger, less nose | 90928-1* | 90929-1* |
| Ford S/B, 174 supercharger, less nose | 90930-1* | 90931-1* |
| Chevy S/B & B/B, 177 supercharger, less nose | 6020-1* | 6021-1* |
| Chevy S/B & B/B, 250 supercharger, less nose | 91056-1* | 91057-1* |
| Chevy B/B, 256 supercharger, less nose | 6040* | 6041* |
| 6-71 supercharger | 7476 | 7476P |
| 8-71 supercharger | 7178 | 7178P |

(*) Includes a front bearing plate cover

SUPERCHARGERS



7136P

Supercharger Intake Manifolds

| Application | Satin | Polished |
|---|-------------------|--------------------|
| 142 Chevy S/B, E.O. | 6100 | 6101WIN |
| 142 Chevy S/B | 6110WIN | 6111WIN |
| 144 Chevy S/B, low profile; 144 Chevy/GMC truck | 90580 | 90581 |
| 174 Chevy B/B, low profile | 90584 | 90585 |
| 174 Ford S/B | 91053 | 91054 |
| 177 Chevy S/B | 6150WIN | 6151 |
| 177 Chevy B/B, oval port | 6120WIN | 6121WIN |
| 177 Chevy B/B, rectangle port | 6130WIN | 6131WIN |
| 250 Chevy S/B | 93212 | 93211 |
| 250 Chevy B/B | N/A | 93218 |
| 256 Chevy B/B, rectangle port | 6140WIN | 6141 |
| 6-71-8-71 Chevy S/B '55-'86 | 7136WIN | 7136P |
| 6-71-8-71 Chevy B/B 396-502 | 7151 ¹ | 7151P ¹ |
| 6-71-8-71 Chevy B/B 396-502, tall deck | 7152 ¹ | 7152P ¹ |
| 6-71-8-71 Chrysler 331-354-392 HEMI | 7138WIN | 7138P |
| 6-71-8-71 Chrysler 426 HEMI | 7150 ² | 7150P ² |

Note: All 6-71-14-71 manifolds are designed for standard valve cover clearance and come complete with pop-off plate kit.

(*) Will not fit 1993 and later LT1 heads. Slight elongation of the four center mounting holes may be required to install on some late model cylinder heads.

(1) Manifold is designed to be used with either oval or rectangular port heads and must use large Fel Pro intake gasket

(2) Manifold is suitable for full competition or street use and includes cast bases for port nozzle injection, and has the capability of a burst plate.

WATER PUMPS



90581

PART# TO PAGE INDEX



SUPERCHARGER SERVICE PARTS



Supercharger Nose Assemblies

| Application | Nose with Idler Assy and Pulley | | Nose only | |
|--|---------------------------------|----------|-----------|----------|
| | Satin | Polished | Satin | Polished |
| 142 Chevy S/B, E.O. '86 only | 6074 | 6075 | 6094 | 6095 |
| 142 Chevy S/B, 144 S/B (low profile), 177 B/B, long nose | 6070 | 6071 | 6090 | 6091 |
| 142 Chevy S/B, 177 B/B; short nose | 6072 | 6073 | 6092 | 6093 |
| 144 Chevy/GMC truck kit | N/A | N/A | 90889 | 90890 |
| 177 Chevy S/B; short nose | 6065 | 6066 | 6082 | 6083 |
| 177 Chevy S/B; long nose | 6062 | 6063 | 6085 | 6086 |
| 250 Chevy S/B | N/A | N/A | N/A | 91153 |
| 250 Chevy B/B | N/A | N/A | N/A | 91155 |
| 256 Chevy; long nose | 6076 | 6077 | 6096 | 6097 |
| 6-71 nose drive assembly/gear cover (6-13/16" long, 2-1/4" register) 1/2 pitch only | N/A | N/A | 7024 | 7024P |
| 6-71 nose drive assembly (3 3/4" long, 2" register), SB Chevy onl; 8mm | N/A | N/A | 7103WIN | 7103P |
| 6-71-8-71 nose drive assembly, BB Chevy 6-71, SB Chevy 8-71, BB Chevy, 426 Chrysler Hemi 8-71 UP, (4 13/16" long, 2" register) | N/A | N/A | 7104WIN | 7104P |
| 6-71-8-71 nose drive, mainshaft only (2-1/4" register) | N/A | N/A | 7025 | |
| 6-71-8-71 nose drive, mainshaft only (2" register) | N/A | N/A | 7105WIN | |

Pro-Street Supercharger Drive Coupler Kits

| Application | Part # |
|-----------------------------|--------|
| 142, 177, 256 superchargers | 7062 |
| 144, 174, 250 superchargers | 7063 |

Idler Parts



| Application | Satin | Polished |
|---|-------|----------|
| 142-256* Idler pulley arm for superchargers | 6080 | 6081 |
| 6-71 Chevy SB Idler pulley bracket, (incl. hardware) | 7067 | 7067P |
| 6-71 Chevy BB Idler pulley bracket, (incl. hardware) | 7068 | 7068P |
| 8-71 Chevy SB Idler pulley bracket, (incl. hardware) | 7069 | 7069P |
| Idler pulley bracket, BB Chevy for supercharger kits | 7070 | 7070P |
| 7186/7186P /7190P/7195P (incl. hardware) | | |
| 6-71 Idler pulley bracket, 392 Chrysler Hemi (incl. hardware) | 7064 | 7064P |
| 8-71 Idler pulley bracket, 426 Chrysler Hemi (incl. hardware) | 7073 | 7073P |
| Idler pulley bracket, BB Chevy for supercharger kits | 7071 | 7071P |
| 7191P/7186P/7196P/7194 (incl. hardware) | | |
| Idler pulley bracket, BB Chevy for supercharger kits | 7072 | 7072P |
| 7192P/7193P/7197P (incl. hardware) | | |
| Idler Pulley, 6-rib | | 6799 |
| Idler Pulley, 10-rib | | 6899 |
| Idler Pulley, 16-rib | | 6699 |
| Idler Pulley, 6-71-14-71 | | 7027 |
| Tension Spring, 142-256 | | 6998 |
| 144 Chevy/GMC truck kit, idler assembly | | 90822 |
| 174 Ford S/B, idler assembly | | 91163 |
| 250 Chevy S/B & B/B, idler bracket and spacers | | 91055 |
| 250 Chevy S/B & B/B, idler pulley, Gilmer | | 91094 |

*Except 144 Chevy/GMC truck, 174 Ford S/B, and 250 Chevy S/B and B/B

MANIFOLDS

SUPERCHARGERS

WATER PUMPS

PART# TO PAGE INDEX

Tech Line: 270-781-9741


49

SUPERCHARGERS

SERVICE PARTS

SUPERCHARGER SERVICE PARTS

MANIFOLDS



7077

SUPERCHARGERS



7080WIN



7078

WATER PUMPS



7079

7158WIN

7159WIN

PART# TO PAGE INDEX



7165

Gaskets

| Application | Part # |
|--|---------|
| Supercharger to manifold, Chevrolet S/B 142 | 6900 |
| Supercharger to manifold, Chevrolet S/B 144 | 90524 |
| Supercharger to manifold, Ford S/B, Chevrolet B/B 174 | 90565 |
| Supercharger to manifold, Chevrolet S/B, B/B 177 | 6901WIN |
| Supercharger to manifold, Chevrolet S/B, B/B 250 | 155285 |
| Gasket, bearing plate to front or rear cover, 250 | 6902WIN |
| Supercharger to manifold O-Ring for Chevrolet B/B 256 blower case | 6904WIN |
| Gasket set, Supercharger case assy, 142 & 144 (-1 Blowers) | 91133 |
| EGR valve to manifold, Chevrolet V8, 142 | 6920WIN |
| Spread-bore carburetor to supercharger, Chevrolet (142/177) | 6940 |
| Water outlet/thermostat housing to manifold, Chevrolet V8 | 6941 |
| Carburetor Adapter to Blower 256 - Dual 4V or Single 4V | 7080WIN |
| Gasket, supercharger to manifold, 6-71 - 8-71 | 7077 |
| Gasket, front gear cover to supercharger, 6-71 - 8-71 | 7078 |
| Gasket, carburetor adapter to supercharger, 250 | 91185 |
| Gasket, #7104, 7103, 7044 nose drives to #7039 gear cover, 6-71 - 8-71 | 7079 |
| Gasket, Carburetor adapter to supercharger, 6-71 - 8-71 | 7080WIN |
| Gasket, #7157 pop-off plate, front of manifold, 6-71 - 8-71 | 7158WIN |
| Gasket, #7155 pop-off plate, rear of manifold, 6-71 - 8-71 | 7159WIN |
| Gasket/seal kit for old B&M/Holley Blowers | 91165 |

Supercharger Carburetor Adapters

| Application | Satin | Polished |
|--|-------------------|--------------------|
| 1x4 256, 6-71 - 8-71 adapter, 1" tall, Holley/Carter AFB carb. | 7162WIN | 7162P |
| 1x4 250 adapter, 1" tall, Holley/Carter AFB carb. | N/A | 93150 |
| 2x4 256, 6-71 thru 14-71 adapter, 1" tall, Holley/Carter AFB carb. | 7163 ¹ | 7163P ¹ |
| 2x4 6-71 thru 14-71 adapter, 2 3/4" tall, Holley/Carter AFB carb. | 7164 ¹ | 7164P ¹ |
| 2x4 6-71 thru 14-71 adapter, 1" tall, Holley 4500 Dominator | 7165 | 7165P |
| 2x4 250 adapter, 1" tall, Holley/Carter AFB carb. | N/A | 93151 |

1. Not designed to fit some vacuum secondary carburetors



SUPERCHARGER SERVICE PARTS



7052WIN


Supercharger Bearing Plates, Bearings

| Application | Satin | Polished |
|--|---------|----------|
| Front Bearing Plate, 6-71-8-71 | 7051WIN | 7051P |
| Rear Bearing Plate and cover assembly, 6-71-8-71 | 7052WIN | 7052P |
| Rear bearing cover only, 6-71-8-71 | 7057 | 7057P |
| Bearing, 7051 front bearing plate (Pair) | 7049 | |
| Bearing, 7052 rear bearing plate (Pair) | 7050WIN | |



Water Outlets

| Application | Satin | Polished |
|---|---------|----------|
| Emissions system outlet, Chevrolet SB, Allows use of temperature control switches to be used, 142-256 | 6200 | 6201WIN |
| Offset adapter for easier thermostat placement | N/A | 90845 |
| Housing, Offset to driver side | N/A | 90523 |
| OE housing for clearance with radial style A/C compressor | 92356 | N/A |
| Housing, remote thermostat | 7134WIN | 7134P |
| Housing, remote thermostat (392 Hemi) | 7132WIN | 7132P |

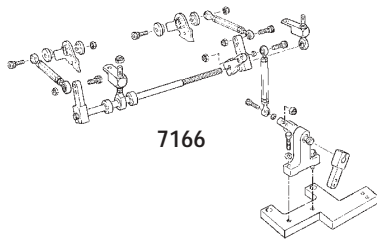

7166

Carburetor Linkage and Fuel Line Kits

| Application | Part # |
|--|---------------------|
| Carburetor linkage, w/side mounted 4V carburetors, 250 | 93167 |
| Carburetor linkage, w/in-line 4V carburetors, 250 | 93197 |
| Carburetor linkage, w/side mounted 4V carburetors, 256 | 6980 ^{1,2} |
| Carburetor linkage, w/in-line 4V carburetors, 256 | 6981 ^{1,3} |
| Carburetor linkage, w/side mounted 4V carburetors, 6-71-8-71 | 7166 ^{1,2} |
| Carburetor linkage, w/in-line 4V carburetors, 6-71-8-71 | 7167 ^{1,3} |
| Dual Holley Fuel Line kit,(4150 model), features #6 AN carb adapters,6061-T6 fuel block,1/8" NPT port for a pressure gauge, #8 AN fuel inlet. Must be used with carb adapter plate 7163. | 7093 |

1. Not designed to fit some vacuum secondary carburetors
2. Designed to fit mechanical secondary carburetors
3. Not designed to fit some mechanical secondary carburetors

MANIFOLDS

SUPERCHARGERS

WATER PUMPS

PART# TO PAGE INDEX

Tech Line: 270-781-9741

51

SUPERCHARGERS

SERVICE PARTS

SUPERCHARGER SERVICE PARTS

MANIFOLDS



7157WIN

6988

Miscellaneous Service Parts

| Application | Part # |
|---|----------------------|
| Pressure relief valve (1/8"NPT), Includes 1/4"NPT adapter | 6988 |
| Pop-off plates, front of manifold, Chevy and Chrysler, 6-71-14-71(1-3/4" install height) | 7157WIN ¹ |
| Pop-off plates, rear of manifold, Chevy, 6-71-14-71 (1-3/8" install height) | 7155WIN ¹ |
| Aluminum Stud Kit, 6-71-14-71 | 7082WIN |
| Vacuum/boost gauge, 0-30" vacuum, 0-15 lbs of boost, 2-1/16" dia. | 90520 |
| Alternator bracket for SB Chevy or 90° V6 - chrome plated, low mount, for street rods, (will not fit 1960 and later stock frames) | 64221 |
| Alternator bracket for BB Chevy - chrome plated, low mount, for street rods, (will not fit 1960 and later stock frames) | 64222 |

1. For polished order 7157P or 7155P.



64221

90520

SUPERCHARGERS



7220

Air Scoops

Hilborn and Enderle style air scoops will complete your supercharger installation.

| Application | Length | Width | Height | Part # |
|---------------|--------|-------|--------|--------|
| Hilborn (1x4) | 13" | 10" | 6.25" | 7220 |
| Hilborn (2x4) | 20" | 10" | 6.25" | 7221 |
| Enderle (1x4) | 15.75" | 13.5" | 6" | 7222 |
| Enderle (2x4) | 20.25" | 13.5" | 6" | 7223 |



7223

WATER PUMPS



64280

Holley Hi Tek air cleaner

- Unique low profile design
- Highly polished aluminum
- Includes POWERSHOT filters

| Application | Part # |
|-----------------------------------|--------|
| Air cleaner assembly | 64280 |
| Replacement POWERSHOT air filters | 90633 |

Megascoop carburetor scoop

- Great custom look
- Single large opening for maximum air intake
- Highly polished aluminum casting
- Designed for a 1x4 carb installation

| Application | Part # |
|--------------------------------------|--------|
| Air cleaner assembly 1x4 application | 93157 |
| Replacement filter element | 93156 |



93157

PART# TO PAGE INDEX